

## Statement of Verification

BREG EN EPD No.: 000078  
ECO EPD Ref. No. 000239

Issue 07

This is to verify that the

### Environmental Product Declaration

provided by:

Colakoglu Metalurji A.S (member of UK CARES)

is in accordance with the requirements of:

**EN 15804:2012+A2:2019**

and

**BRE Global Scheme Document SD207**

This declaration is for:

**Hot rolled flat steel (Secondary Production Route – Scrap)**

**BRE Global  
Verified  
EPD**

### Company Address

Dilovası Organize Sanayi Bölgesi,  
1. Kısım Göksu Caddesi No: 16,  
41455 Dilovası, Kocaeli,  
Turkey



 **Çolakoğlu Metalurji**



Signed for BRE Global Ltd

Emma Baker  
Operator

21 April 2023  
Date of this Issue

27 February 2017  
Date of First Issue

20 April 2026  
Expiry Date



This Statement of Verification is issued subject to terms and conditions (for details visit [www.greenbooklive.com/terms](http://www.greenbooklive.com/terms).)

To check the validity of this statement of verification please, visit [www.greenbooklive.com/check](http://www.greenbooklive.com/check) or contact us.

BRE Global Ltd., Garston, Watford WD25 9XX.

T: +44 (0)333 321 8811 F: +44 (0)1923 664603 E: [Enquiries@breglobal.com](mailto:Enquiries@breglobal.com)



## Environmental Product Declaration

EPD Number: 000078

### General Information

EPD Programme Operator	Applicable Product Category Rules
BRE Global Watford, Herts WD25 9XX United Kingdom	BRE Environmental Profiles 2013 Product Category Rules for Type III environmental product declaration of construction products to EN 15804+A2 PN 514 Rev 3.0
Commissioner of LCA study	LCA consultant/Tool
UK CARES Pembroke House 21 Pembroke Road Sevenoaks Kent, TN13 1XR UK	UK CARES EPD Tool thinkstep UK Ltd Euston Tower - Level 33, 286 Euston Road London, NW1 3DP www.thinkstep.com
Declared/Functional Unit	Applicability/Coverage
1 tonne of hot rolled flat steel product manufactured by the secondary (scrap-based) production route.	Manufacturer-specific product.
EPD Type	Background database
Cradle to Gate with options	GaBi
Demonstration of Verification	
CEN standard EN 15804 serves as the core PCR <sup>a</sup>	
Independent verification of the declaration and data according to EN ISO 14025:2010 <input type="checkbox"/> Internal <input checked="" type="checkbox"/> External	
(Where appropriate <sup>b</sup> ) Third party verifier: Pat Hermon	
a: Product category rules b: Optional for business-to-business communication; mandatory for business-to-consumer communication (see EN ISO 14025:2010, 9.4)	
Comparability	
Environmental product declarations from different programmes may not be comparable if not compliant with EN 15804:2012+A2:2019. Comparability is further dependent on the specific product category rules, system boundaries and allocations, and background data sources. See Clause 5.3 of EN 15804:2012+A2:2019 for further guidance	

## Information modules covered

Product			Construction		Use stage							End-of-life				Benefits and loads beyond the system boundary
A1	A2	A3	A4	A5	Related to the building fabric				Related to the building			C1	C2	C3	C4	D
Raw materials supply	Transport	Manufacturing	Transport to site	Construction – Installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	Deconstruction demolition	Transport	Waste processing	Disposal	Reuse, Recovery and/or Recycling potential
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

Note: Ticks indicate the Information Modules declared.

## Manufacturing site

Colakoglu Metalurji A.S (member of UK CARES)

Dilovası Organize Sanayi Bölgesi,  
1. Kısım Göksu Caddesi No: 16,  
41455 Dilovası, Kocaeli,  
Turkey

## Construction Product:

### Product Description

Hot Rolled Flat Steels in coils, sheets, plates and other required forms are non-alloy or low-alloy steel products. Hot Rolled Flat Steel Coil (according to product standards listed in Sources of Additional Information) that is obtained from scrap, melted in an Electric Arc Furnace (EAF) followed by hot rolling.

Hot Rolled Flat Steel Coil is produced as a feedstock for cold rolled flat steel coil and coated steel coil, but also for direct use in a variety of industrial applications including construction, hot and cold forming, gas containers, pressure vessels, steel tubes used in transport and energy pipelines.

The declared unit is 1 tonne of hot rolled flat steel coil as used in a variety of industrial applications.

## Technical Information

Property	Value, Unit
Production route	EAF
Density	7850 kg/m <sup>3</sup>
Modulus of elasticity	200000 N/mm <sup>2</sup>
<b>Weldability, Carbon Equivalent (Ceq)</b> EN 10025-2:2004 grades S235JR, S235J0, S235J2, S275JR, S275J0, S275J2, S355JR, S355J0, S355J2; S235JRC, S235J0C, S235J2C, S275JRC, S275J0C, S275J2C and S355JRC, S355J0C, S355J2C (for product thickness ≥1mm & ≤26mm)  EN 10025-5-2:2004 grades S355J0WP, S355J2WP (for product thickness ≥1mm & ≤12mm)	max 0.35% for S235 grade series max 0.40% for S275 grade series max 0.45% for S355 grade series  max 0.52% for all grades and for all thicknesses
<b>Yield Strength</b> EN 10025-2:2004 grades S235JR, S235J0, S235J2, S275JR, S275J0, S275J2, S355JR, S355J0, S355J2; S235JRC, S235J0C, S235J2C, S275JRC, S275J0C, S275J2C and S355JRC, S355J0C, S355J2C (for product thickness ≥1mm & ≤16mm and for thickness >16mm & ≤26mm)  EN 10025-5:2004 grades S355J0WP, S355J2WP (for product thickness ≥1mm & ≤12mm)	225 to 235 N/mm <sup>2</sup> for S235 grade series 265 to 275 N/mm <sup>2</sup> for S275 grade series 345 to 355 N/mm <sup>2</sup> for S355 grade series  min 355 N/mm <sup>2</sup> for S355J0WP, S355J2WP
<b>Tensile Strength</b> EN 10025-2:2004 grades S235JR, S235J0, S235J2, S275JR, S275J0, S275J2, S355JR, S355J0, S355J2; S235JRC, S235J0C, S235J2C, S275JRC, S275J0C, S275J2C and S355JRC, S355J0C, S355J2C (for product thickness ≥1mm & <3mm and for thickness ≥3mm & ≤26mm)  EN 10025-5-2:2004 grades S355J0WP, S355J2WP (for product thickness ≥1mm & <3mm and for thickness ≥3mm & ≤26mm)	360 to 510 N/mm <sup>2</sup> for S235 grade series 410 to 580 N/mm <sup>2</sup> for S275 grade series 470 to 680 N/mm <sup>2</sup> for S355 grade series  470-680 N/mm <sup>2</sup> for S355J0WP, S355J2WP
<b>%Elongation</b> EN 10025-2:2004 grades S235JR, S235J0, S235J2, S275JR, S275J0, S275J2, S355JR, S355J0, S355J2; S235JRC, S235J0C, S235J2C, S275JRC, S275J0C, S275J2C and S355JRC, S355J0C, S355J2C (longitudinal test piece L <sub>0</sub> =80 mm for thickness ≥1mm & <3mm and longitudinal test piece L <sub>0</sub> =5.65√S <sub>0</sub> mm for thickness ≥3mm & ≤26mm)  EN 10025-5-2:2004 grades S355J0WP, S355J2WP (min, longitudinal test piece L <sub>0</sub> =80 mm for thickness >1.5mm & <3mm; longitudinal test piece L <sub>0</sub> =5.65√S <sub>0</sub> mm for thickness ≥3mm & ≤26mm)	min 17 to min 26% for S235 grade series min 15 to min 23% for S275 grade series min 14 to min 22% for S355 grade series  min 16 to min 22 for S355J0WP, S355J2WP
<b>Impact Strength KV longitudinal</b> EN 10025-2:2004 grades S235JR, S235J0, S235J2, S275JR, S275J0, S275J2, S355JR, S355J0, S355J2; S235JRC, S235J0C, S235J2C, S275JRC, S275J0C, S275J2C and S355JRC, S355J0C, S355J2C  EN 10025-5-2:2004 grades S355J0WP, S355J2WP	min 27J at 20°C for all JR types min 27J at 0°C for all J0 types min 27J at -20°C for all J2 types

	min 27J at 0°C for S355J0WP min 27J at -20°C for S355J2WP
Property	Value, Unit
Recycled content (as per ISO 14021:2016)	80.5 %

### Main Product Contents

Material/Chemical Input	%
Fe	97
C, Mn, Si, V, Ni, Cu, Cr, Mo and others	3

### Manufacturing Process


Scrap metal and/or DRI and/or HBI is melted in an electric arc furnace to obtain liquid steel. This is then refined to remove impurities and alloying additions can be added to give the required properties.

Hot metal (molten steel) from the EAF is then cast into steel slabs before being sent to the rolling mill (strip mill) where they are rolled and shaped to the required dimensions for the finished coils of hot rolled flat steel.

Quality assurance and quality control of hot rolled flat steel are maintained according to ISO 9001 and product standards listed in Sources of Additional Information.

The products are packed with steel straps to bind the products, either of the steel straps and products do not include any biogenic materials.

Process flow diagram

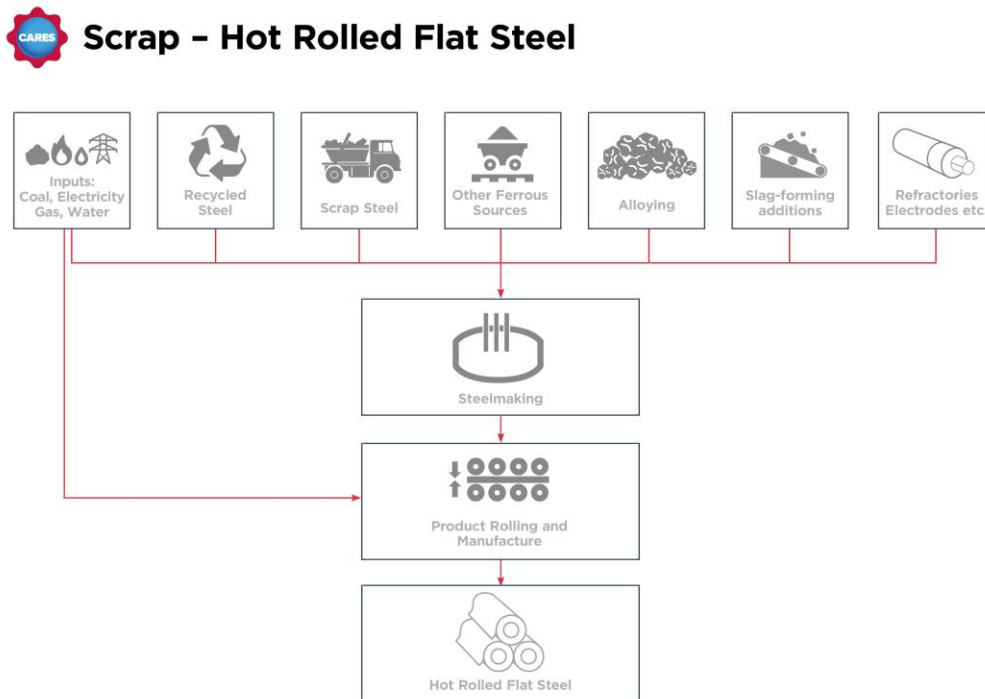

Construction Installation

Processing and proper use of hot rolled flat steel products depends on the application and should be made in accordance with generally accepted practices, standards and manufacturing recommendations.

During transport and storage of hot rolled flat steel products the usual requirements for securing loads is to be observed.

Use Information

The composition of the hot rolled flat steel products does not change during use.

Hot rolled flat steel products do not cause adverse health effects under normal conditions of use.

No risks to the environment and living organisms are known to result from the mechanical destruction of the hot rolled flat steel product itself.

End of Life

Hot rolled flat steel products can be reused after dismantling, renovating and demolishing and also can be recycled to the same (or higher/lower) quality of steel depending upon the metallurgy and processing of the recycling route.

It is a high value resource, so efforts are made to recycle steel scrap rather than disposing of it at EoL. A recycling rate of 92% is typical for hot rolled flat steel products

## Life Cycle Assessment Calculation Rules

### Declared unit description

The declared unit is 1 tonne of hot rolled flat steel product manufactured by the secondary (scrap-based) production route

### System boundary

The system boundary of the EPD follows the modular design defined by EN 15804+A2. This is a cradle to gate – with options EPD and thus covers modules from A1 to A4, modules from C1 to C4 and module D.

Impacts and aspects related to losses/wastage (i.e. production, transport and waste processing and end-of-life stage of lost waste products and materials) are considered in the modules in which the losses/wastage occur.

Once steel scrap has been collected for recycling it is considered to have reached the end of waste state.

### Data sources, quality and allocation

Data Sources: Manufacturing data of the period 01/01/2021-31/12/2021 has been provided by Colakoglu Metalurji A. S. (member of UK CARES).

The selection of the background data for electricity generation is in line with the BRE Global PCR. Country or region specific power grid mixes are selected from GaBi 2021 databases (Sphera 2021) databases; thus, consumption grid mix of Turkey has been selected to suit specific manufacturing location.

Data Quality: Data quality can be described as good. Background data are consistently sourced from the GaBi 2021 databases (Sphera 2021). The primary data collection was thorough, considering all relevant flows and these data have been verified by UK CARES.

Data quality level and criteria of the UN Environment Global Guidance on LCA database development:

Geographical Representativeness	: Good
Technical Representativeness	: Very good
Time Representativeness	: Good

Allocation: EAF slag and mill scale are produced as co-products from the steel manufacturing process. Impacts are allocated between the steel, the slag and the mill scale based on economic value. The revenue generated from both mill scale and EAF slag are 0.02% and 0.24% respectively, and their total is less than 1% in relation to the product based on current market prices, these co-products are of definite value and are freely/readily traded in reality. For this reason, economic allocation has been applied to the processes where these co-products arise.

Production losses of steel during the production process are recycled in a closed loop offsetting the requirement for external scrap. Specific information on allocation within the background data is given in the GaBi datasets documentation (/GaBi 6 2021/)

### Cut-off criteria

On the input side all flows entering the system and comprising more than 1% in total mass or contributing more than 1% to primary energy consumption are considered. All inputs used as well as all process-specific waste and process emissions were assessed. For this reason, material streams which were below 1% (by mass) were captured as well. In this manner the cut-off criteria according to the BRE guidelines are fulfilled.

The mass of steel strap used for binding the product is less than 1 % of the total mass of the product.

## LCA Results

(MND = module not declared; MNR = module not relevant; INA = indicator not assessed; AGG = aggregated)

Parameters describing environmental impacts			GWP-total	GWP-fossil	GWP-biogenic	GWP-luluc	ODP	AP	EP-freshwater
			kg CO <sub>2</sub> eq	kg CO <sub>2</sub> eq	kg CO <sub>2</sub> eq	kg CO <sub>2</sub> eq	kg CFC11 eq	mol H <sup>+</sup> eq	kg (PO <sub>4</sub> ) <sup>3-</sup> eq
Product stage	Raw material supply	A1	807	807	-0.157	0.315	1.33E-07	2.31	6.07E-04
	Transport	A2	56.3	56.2	0.068	0.017	5.86E-15	2.08	1.78E-05
	Manufacturing	A3	494	493	0.792	0.190	1.26E-12	4.12	2.24E-04
	Total (of product stage)	A1-3	1.36E+03	1.36E+03	0.703	0.522	1.33E-07	8.51	8.49E-04
Construction process stage	Transport	A4	MND	MND	MND	MND	MND	MND	MND
	Construction	A5	MND	MND	MND	MND	MND	MND	MND
Use stage	Use	B1	MND	MND	MND	MND	MND	MND	MND
	Maintenance	B2	MND	MND	MND	MND	MND	MND	MND
	Repair	B3	MND	MND	MND	MND	MND	MND	MND
	Replacement	B4	MND	MND	MND	MND	MND	MND	MND
	Refurbishment	B5	MND	MND	MND	MND	MND	MND	MND
	Operational energy use	B6	MND	MND	MND	MND	MND	MND	MND
	Operational water use	B7	MND	MND	MND	MND	MND	MND	MND
<b>%92 Recycling / %8 Landfill Scenario</b>									
End of life	Deconstruction, demolition	C1	0	0	0	0	0	0	0
	Transport	C2	40.6	40.3	-0.046	0.312	5.10E-15	0.178	1.14E-04
	Waste processing	C3	0	0	0	0	0	0	0
	Disposal	C4	1.18	1.21	-0.035	0.004	4.70E-15	0.009	2.03E-06
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	-2.25E+02	-2.25E+02	0.392	-0.005	1.05E-12	-0.622	-3.89E-05
<b>100% Lanfill Scenario</b>									
End of life	Deconstruction, demolition	C1	0	0	0	0	0	0	0
	Transport	C2	1.88	1.86	-0.002	0.015	2.38E-16	0.007	5.53E-06
	Waste processing	C3	0	0	0	0	0	0	0
	Disposal	C4	14.7	15.1	-0.439	0.044	5.87E-14	0.108	2.54E-05
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	1.57E+03	1.57E+03	-2.74	0.037	-7.35E-12	4.34	2.71E-04
<b>100% Recycling Scenario</b>									
End of life	Deconstruction, demolition	C1	0	0	0	0	0	0	0
	Transport	C2	43.9	43.6	-0.049	0.338	5.53E-15	0.192	1.23E-04
	Waste processing	C3	0	0	0	0	0	0	0
	Disposal	C4	0	0	0	0	0	0	0
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	-380	-381	0.665	-0.009	1.78E-12	-1.05	-6.59E-05

GWP-total = Global warming potential, total;  
 GWP-fossil = Global warming potential, fossil;  
 GWP-biogenic = Global warming potential, biogenic;  
 GWP-luluc = Global warming potential, land use and land use change;

ODP = Depletion potential of the stratospheric ozone layer;  
 AP = Acidification potential, accumulated exceedance; and  
 EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment



## LCA Results (continued)

(MND = module not declared; MNR = module not relevant; INA = indicator not assessed; AGG = aggregated)

Parameters describing environmental impacts			EP-marine	EP-terrestrial	POCP	ADP-mineral & metals	ADP-fossil	WDP	PM
			kg N eq	mol N eq	kg NMVOC eq	kg Sb eq	MJ, net calorific value	m <sup>3</sup> world eq	disease incidence
Product stage	Raw material supply	A1	0.530	5.18	1.57	4.20E-04	7.09E+03	17.8	2.94E-05
	Transport	A2	0.530	5.81	1.48	1.77E-06	683	0.105	3.46E-05
	Manufacturing	A3	0.337	3.68	1.11	3.19E-05	6.01E+03	209	3.73E-05
	Total (of product stage)	A1-3	1.40	14.67	4.16	4.54E-04	1.38E+04	227	1.01E-04
Construction process stage	Transport	A4	MND	MND	MND	MND	MND	MND	MND
	Construction	A5	MND	MND	MND	MND	MND	MND	MND
Use stage	Use	B1	MND	MND	MND	MND	MND	MND	MND
	Maintenance	B2	MND	MND	MND	MND	MND	MND	MND
	Repair	B3	MND	MND	MND	MND	MND	MND	MND
	Replacement	B4	MND	MND	MND	MND	MND	MND	MND
	Refurbishment	B5	MND	MND	MND	MND	MND	MND	MND
	Operational energy use	B6	MND	MND	MND	MND	MND	MND	MND
	Operational water use	B7	MND	MND	MND	MND	MND	MND	MND
<b>%92 Recycling / %8 Landfill Scenario</b>									
End of life	Deconstruction, demolition	C1	0	0	0	0	0	0	0
	Transport	C2	0.085	0.940	0.179	2.97E-06	536	0.334	1.39E-06
	Waste processing	C3	0	0	0	0	0	0	0
	Disposal	C4	0.002	0.025	0.007	1.14E-07	16.0	0.130	1.07E-07
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	-0.129	-1.40	-0.431	4.81E-06	-1.64E+03	4.62	-8.12E-06
<b>100% Lanfill Scenario</b>									
End of life	Deconstruction, demolition	C1	0	0	0	0	0	0	0
	Transport	C2	0.003	0.035	0.006	1.42E-07	24.8	0.016	3.43E-08
	Waste processing	C3	0	0	0	0	0	0	0
	Disposal	C4	0.028	0.307	0.085	1.43E-06	201.0	1.62	1.34E-06
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	0.901	9.76	3.01	-3.36E-05	1.15E+04	-32.3	5.67E-05
<b>100% Recycling Scenario</b>									
End of life	Deconstruction, demolition	C1	0	0	0	0	0	0	0
	Transport	C2	0.092	1.02	0.194	3.22E-06	581	0.362	1.50E-06
	Waste processing	C3	0	0	0	0	0	0	0
	Disposal	C4	0	0	0	0	0	0	0
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	-0.219	-2.37	-0.731	8.15E-06	-2.78E+03	7.83	-1.38E-05

EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment;  
 EP-terrestrial = Eutrophication potential, accumulated exceedance;  
 POCP = Formation potential of tropospheric ozone;  
 ADP-mineral&metals = Abiotic depletion potential for non-fossil resources;

ADP-fossil = Depletion potential of the stratospheric ozone layer;  
 WDP = Water (user) deprivation potential, deprivation-weighted water consumption; and  
 PM = Particulate matter.

## LCA Results (continued)

(MND = module not declared; MNR = module not relevant; INA = indicator not assessed; AGG = aggregated)

Parameters describing environmental impacts							
			IRP	ETP-fw	HTP-c	HTP-nc	SQP
			kBq U <sup>235</sup> eq	CTUe	CTUh	CTUh	dimensionless
Product stage	Raw material supply	A1	7.27	0.001	5.32E-07	8.60E-06	4.86E+02
	Transport	A2	0.109	1.78E-05	9.23E-09	4.35E-07	10.3
	Manufacturing	A3	0.833	2.24E-04	7.12E-08	3.60E-06	294
	Total (of product stage)	A1-3	8.2	0.001	6.12E-07	1.26E-05	7.90E+02
Construction process stage	Transport	A4	MND	MND	MND	MND	MND
	Construction	A5	MND	MND	MND	MND	MND
Use stage	Use	B1	MND	MND	MND	MND	MND
	Maintenance	B2	MND	MND	MND	MND	MND
	Repair	B3	MND	MND	MND	MND	MND
	Replacement	B4	MND	MND	MND	MND	MND
	Refurbishment	B5	MND	MND	MND	MND	MND
	Operational energy use	B6	MND	MND	MND	MND	MND
	Operational water use	B7	MND	MND	MND	MND	MND
<b>%92 Recycling / %8 Landfill Scenario</b>							
End of life	Deconstruction, demolition	C1	0	0	0	0	0
	Transport	C2	0.092	1.14E-04	7.79E-09	4.56E-07	174
	Waste processing	C3	0	0	0	0	0
	Disposal	C4	0.018	2.03E-06	1.35E-09	1.49E-07	3.24
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	2.57	-3.89E-05	-3.57E-07	-1.22E-06	134
<b>100% Lanfill Scenario</b>							
End of life	Deconstruction, demolition	C1	0	0	0	0	0
	Transport	C2	0.004	5.53E-06	3.61E-10	2.14E-08	8.51
	Waste processing	C3	0	0	0	0	0
	Disposal	C4	0.221	2.54E-05	1.69E-08	1.86E-06	40.5
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	-18.0	2.71E-04	2.49E-06	8.50E-06	-937
<b>100% Recycling Scenario</b>							
End of life	Deconstruction, demolition	C1	0	0	0	0	0
	Transport	C2	0.100	1.23E-04	8.44E-09	4.94E-07	189
	Waste processing	C3	0	0	0	0	0
	Disposal	C4	0	0	0	0	0
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	4.36	-6.59E-05	-6.05E-07	-2.06E-06	227

IRP = Potential human exposure efficiency relative to U235;  
ETP-fw = Potential comparative toxic unit for ecosystems;  
HTP-c = Potential comparative toxic unit for humans;

HTP-nc = Potential comparative toxic unit for humans; and  
SQP = Potential soil quality index.

## LCA Results (continued)

Parameters describing resource use, primary energy			PERE	PERM	PERT	PENRE	PENRM	PENRT
			MJ	MJ	MJ	MJ	MJ	MJ
Product stage	Raw material supply	A1	437	0	437	7.13E+03	0	7.13E+03
	Transport	A2	3.69	0	3.69	684	0	684
	Manufacturing	A3	1.38E+03	0	1.38E+03	6.01E+03	0	6.01E+03
	Total (of product stage)	A1-3	1.82E+03	0	1.82E+03	1.38E+04	0	1.38E+04
Construction process stage	Transport	A4	MND	MND	MND	MND	MND	MND
	Construction	A5	MND	MND	MND	MND	MND	MND
Use stage	Use	B1	MND	MND	MND	MND	MND	MND
	Maintenance	B2	MND	MND	MND	MND	MND	MND
	Repair	B3	MND	MND	MND	MND	MND	MND
	Replacement	B4	MND	MND	MND	MND	MND	MND
	Refurbishment	B5	MND	MND	MND	MND	MND	MND
	Operational energy use	B6	MND	MND	MND	MND	MND	MND
	Operational water use	B7	MND	MND	MND	MND	MND	MND
<b>%92 Recycling / %8 Landfill Scenario</b>								
End of life	Deconstruction, demolition	C1	0	0	0	0	0	0
	Transport	C2	28.4	0	28.4	537	0	537
	Waste processing	C3	0	0	0	0	0	0
	Disposal	C4	2.16	0	2.16	16.1	0	16.1
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	209	0	209	-1.66E+03	0	-1.66E+03
<b>100% Landfill Scenario</b>								
End of life	Deconstruction, demolition	C1	0	0	0	0	0	0
	Transport	C2	1.38	0	1.38	24.8	0	24.8
	Waste processing	C3	0	0	0	0	0	0
	Disposal	C4	27	0	27	201	0	201
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	-1.46E+03	0	-1.46E+03	1.16E+04	0	1.16E+04
<b>100% Recycling Scenario</b>								
End of life	Deconstruction, demolition	C1	0	0	0	0	0	0
	Transport	C2	30.7	0	30.7	582	0	582
	Waste processing	C3	0	0	0	0	0	0
	Disposal	C4	0	0	0	0	0	0
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	354	0	354	-2.81E+03	0	-2.81E+03

PERE = Use of renewable primary energy excluding renewable primary energy used as raw materials;  
 PERM = Use of renewable primary energy resources used as raw materials;  
 PERT = Total use of renewable primary energy resources;

PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials;  
 PENRM = Use of non-renewable primary energy resources used as raw materials;  
 PENRT = Total use of non-renewable primary energy resource

## LCA Results (continued)

Parameters describing resource use, secondary materials and fuels, use of water						
			SM	RSF	NRSF	FW
			kg	MJ net calorific value	MJ net calorific value	m <sup>3</sup>
Product stage	Raw material supply	A1	0	0	0	17.8
	Transport	A2	0	0	0	0.105
	Manufacturing	A3	-805	0	0	209
	Total (of product stage)	A1-3	-805	0	0	2.27E+02
Construction process stage	Transport	A4	MND	MND	MND	MND
	Construction	A5	MND	MND	MND	MND
Use stage	Use	B1	MND	MND	MND	MND
	Maintenance	B2	MND	MND	MND	MND
	Repair	B3	MND	MND	MND	MND
	Replacement	B4	MND	MND	MND	MND
	Refurbishment	B5	MND	MND	MND	MND
	Operational energy use	B6	MND	MND	MND	MND
	Operational water use	B7	MND	MND	MND	MND
<b>%92 Recycling / %8 Landfill Scenario</b>						
End of life	Deconstruction, demolition	C1	0	0	0	0
	Transport	C2	0	0	0	0.334
	Waste processing	C3	0	0	0	0
	Disposal	C4	0	0	0	0.130
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	-115	0	0	4.62
<b>100% Landfill Scenario</b>						
End of life	Deconstruction, demolition	C1	0	0	0	0
	Transport	C2	0	0	0	0.016
	Waste processing	C3	0	0	0	0
	Disposal	C4	0	0	0	1.62
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	805	0	0	-32.3
<b>100% Recycling Scenario</b>						
End of life	Deconstruction, demolition	C1	0	0	0	0
	Transport	C2	0	0	0	0.362
	Waste processing	C3	0	0	0	0
	Disposal	C4	0	0	0	0
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	-195	0	0	7.83

SM = Use of secondary material;  
RSF = Use of renewable secondary fuels;

NRSF = Use of non-renewable secondary fuels;  
FW = Net use of fresh water

LCA Results (continued)

Other environmental information describing waste categories					
			HWD	NHWD	RWD
			kg	kg	kg
Product stage	Raw material supply	A1	1.73E-07	15.8	0.057
	Transport	A2	6.38E-09	0.070	0.001
	Manufacturing	A3	9.05E-07	63.4	0.011
	Total (of product stage)	A1-3	1.08E-06	79.3	0.069
Construction process stage	Transport	A4	MND	MND	MND
	Construction	A5	MND	MND	MND
Use stage	Use	B1	MND	MND	MND
	Maintenance	B2	MND	MND	MND
	Repair	B3	MND	MND	MND
	Replacement	B4	MND	MND	MND
	Refurbishment	B5	MND	MND	MND
	Operational energy use	B6	MND	MND	MND
	Operational water use	B7	MND	MND	MND
<b>%92 Recycling / %8 Landfill Scenario</b>					
End of life	Deconstruction, demolition	C1	0	0	0
	Transport	C2	2.58E-08	0.078	6.46E-04
	Waste processing	C3	0	0	0
	Disposal	C4	1.70E-09	80.1	1.68E-04
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	2.01E-07	-3.25	0.027
<b>100% Landfill Scenario</b>					
End of life	Deconstruction, demolition	C1	0	0	0
	Transport	C2	1.25E-09	0.004	3.00E-05
	Waste processing	C3	0	0	0
	Disposal	C4	2.13E-08	1.00E+03	0.002
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	-1.41E-06	22.7	-0.189
<b>100% Recycling Scenario</b>					
End of life	Deconstruction, demolition	C1	0	0	0
	Transport	C2	2.79E-08	0.085	6.99E-04
	Waste processing	C3	0	0	0
	Disposal	C4	0	0	0
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	3.41E-07	-5.51	0.046

HWD = Hazardous waste disposed;  
 NHWD = Non-hazardous waste disposed;  
 RWD = Radioactive waste disposed

## LCA Results (continued)

Other environmental information describing output flows – at end of life								
			CRU	MFR	MER	EE	Biogenic carbon (product)	Biogenic carbon (packaging)
			kg	kg	kg	MJ per energy carrier	kg C	kg C
Product stage	Raw material supply	A1	0	0	0	0	0	0
	Transport	A2	0	0	0	0	0	0
	Manufacturing	A3	0	0	0	0	0	0
	Total (of product stage)	A1-3	0	0	0	0	0	0
Construction process stage	Transport	A4	MND	MND	MND	MND	MND	MND
	Construction	A5	MND	MND	MND	MND	MND	MND
Use stage	Use	B1	MND	MND	MND	MND	MND	MND
	Maintenance	B2	MND	MND	MND	MND	MND	MND
	Repair	B3	MND	MND	MND	MND	MND	MND
	Replacement	B4	MND	MND	MND	MND	MND	MND
	Refurbishment	B5	MND	MND	MND	MND	MND	MND
	Operational energy use	B6	MND	MND	MND	MND	MND	MND
	Operational water use	B7	MND	MND	MND	MND	MND	MND
<b>%92 Recycling / %8 Landfill Scenario</b>								
End of life	Deconstruction, demolition	C1	0	-920	0	0	0	0
	Transport	C2	0	0	0	0	0	0
	Waste processing	C3	0	0	0	0	0	0
	Disposal	C4	0	0	0	0	0	0
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	0	0	0	0	0	0
<b>100% Landfill Scenario</b>								
End of life	Deconstruction, demolition	C1	0	0	0	0	0	0
	Transport	C2	0	0	0	0	0	0
	Waste processing	C3	0	0	0	0	0	0
	Disposal	C4	0	0	0	0	0	0
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	0	0	0	0	0	0
<b>100% Recycling Scenario</b>								
End of life	Deconstruction, demolition	C1	0	-1.00E+03	0	0	0	0
	Transport	C2	0	0	0	0	0	0
	Waste processing	C3	0	0	0	0	0	0
	Disposal	C4	0	0	0	0	0	0
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	0	0	0	0	0	0

CRU = Components for reuse;  
MFR = Materials for recycling

MER = Materials for energy recovery;  
EE = Exported Energy

## Scenarios and additional technical information

Scenarios and additional technical information			
Scenario	Parameter	Units	Results
C1 to C4 End of life,	<p>The end-of-life stage starts when the construction product is replaced, dismantled or deconstructed from the building or construction works and does not provide any further function. The recovered steel is transported for recycling while a small portion is assumed to be unrecoverable and remains in the rubble which is sent to landfill. 92% of the reinforcing steel is assumed to be recycled and 8% is sent to landfill [STEELCONSTRUCTION.INFO 2012]. Once steel scrap is generated through the deconstruction activities on the demolition site it is considered to have reached the “end of waste” state. No further processing is required so there are no impacts associated with this module. Hence no impacts are reported in module C3.</p>		
	Waste for recycling - Recovered steel from crushed concrete	%	92
	Waste for energy recovery - Energy recovery is not considered for this study as most end of life steel scrap is recycled, while the remainder is landfilled	-	-
	Waste for final disposal - Unrecoverable steel lost in crushed concrete and sent to landfill	%	8
	Portion of energy assigned to rebar from energy required to demolish building, per tonne	MJ	24
	Transport to waste processing by Truck - Fuel consumption	litre/km	1.56
	Transport to waste processing by Truck – Distance	km	463
	Transport to waste processing by Truck – Capacity utilisation	%	85
	Transport to waste processing by Truck – Density of Product	kg/m <sup>3</sup>	7850
	Transport to waste processing by Container ship - Fuel consumption	litre/km	0.0041
	Transport to waste processing by Container ship - Distance	km	158
	Transport to waste processing by Container ship – Capacity utilisation	%	50
	Transport to waste processing by Container ship – Density of Product	kg/m <sup>3</sup>	7850
Module D	<p>It is assumed that 92% of the steel used in the structure is recovered for recycling, while the remainder is landfilled. “Benefits and loads beyond the system boundary” (module D) accounts for the environmental benefits and loads resulting from net steel scrap that is used as raw material in the EAF and that is collected for recycling at end of life. This study is concerned with the secondary production route and more scrap is required as input to the system than is recovered at end of life. The net effect of this is that module D mainly models the burdens associated with the scrap input (secondary material) to the steelmaking process. The resulting scrap credit/burden is calculated based on the global “value of scrap” approach (/worldsteel 2011).</p>		
	Recycled Content	kg	805
	Re-used Content	kg	0
	Recovered for recycling	kg	920
	Recovered for re-use	kg	0
	Recovered for energy	kg	0

## Summary, comments and additional information

### Interpretation

Scrap-based Hot Rolled Flat Steel Coil product of Colakoglu Metalurji A.S. (member of UK CARES) is made via the EAF route. The bulk of the environmental impacts and primary energy demand is attributed to the manufacturing phase, covered by information modules A1-A3 of EN 15804.

### References

- BSI. Sustainability of construction works – Environmental product declarations – Core rules for the product category of construction products. BS EN 15804:2012+A2:2019. London, BSI, 2019.
- BSI. Environmental labels and declarations – Type III Environmental declarations – Principles and procedures. BS EN ISO 14025:2010 (exactly identical to ISO 14025:2006). London, BSI, 2010.
- BSI. Environmental management – Life cycle assessment – Principles and framework. BS EN ISO BS EN ISO 14040:2006+A1:2020. London, BSI, 2020.
- BSI. Environmental management – Life cycle assessment – requirements and guidelines. BS EN ISO 14044:2006+A2:2020. London, BSI, 2020.
- Demolition Energy Analysis of Office Building Structural Systems, Athena Sustainable Materials Institute, 1997
- Sphera Solutions GmbH; GaBi Software System and Database for Life Cycle Engineering, Sphera Solution GmbH, Leinfelden-Echterdingen, 2021.
- GaBi 10, Content Version 2021.2: Documentation of GaBi 10, Content Version 2021.2: Software-System and Database for Life Cycle Engineering. Copyright, TM. Stuttgart, Echterdingen, 2021. (<http://documentation.gabi-software.com/>)
- International Energy Agency, Energy Statistics 2013. <http://www.iea.org>
- Kreißig, J. und J. Kümmel (1999): Baustoff-Ökobilanzen. Wirkungsabschätzung und Auswertung in der Steine-Erden-Industrie. Hrsg. Bundesverband Baustoffe Steine + Erden e.V.
- U,S, Geological Survey, Mineral Commodity Summaries, Iron and Steel Slag, January 2014
- SteelConstruction.info; The recycling and reuse survey, 2012  
[http://www.steelconstruction.info/The\\_recycling\\_and\\_reuse\\_survey](http://www.steelconstruction.info/The_recycling_and_reuse_survey)
- Sustainability of construction works - Environmental product declarations - Methodology for selection and use of generic data; German version CEN/TR 15941
- REGULATION (EU) No 305/2011 OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL of 9 March 2011 laying down harmonised conditions for the marketing of construction products and repealing Council Directive 89/106/EEC
- CARES SCS (Sustainable Constructional Steel) Scheme. Appendix 6 – Operational assessment schedule for the sustainable production of hot rolled flat steel products..



CARES CPR (Construction Products Regulation) Scheme - <https://www.carescertification.com/certified-companies/search> - Certificate number of conformance to EN10025-2 at the time of LCA study – 1244-CPR-1052

KIWA Certificate of conformity of the factory production control - Hot rolled products of structural steels - Certificate number of conformance to Regulation 305/2011/EU of the European Parliament and of the Council of 9 March 2011 (the Construction Products Regulation or CPR) at the time of LCA study - 0620-CPR-58521/05

Material Manufacturer Certificate - Certificate number of conformance to Pressure Equipment Directive 2014/68/EU at the time of LCA study – HPiVS-P1057-043-Q-06-00

EN 10025-1:2004 - Hot Rolled Products of Structural Steels - Part 1: General Technical Delivery Conditions

EN 10025-2:2019 - Hot Rolled Products of Structural Steels - Part 2: Technical Delivery Conditions for Non-alloy Structural Steels

EN 10025-3: 2019 - Hot rolled products of structural steels - Part 3: Technical delivery conditions for normalized/normalized rolled weldable fine grain structural steels

EN 10025-4:2019+A1: 2022 - Hot rolled products of structural steels - Part 4: Technical delivery conditions for thermomechanical rolled weldable fine grain structural steels.

EN 10025-5: 2019 - Hot rolled products of structural steels - Part 5: Technical delivery conditions for structural steels with improved atmospheric corrosion resistance

EN 10025-6: 2019+A1: 2022 - Hot rolled products of structural steels - Part 6: Technical delivery conditions for flat products of high yield strength structural steels in the quenched and tempered condition

EN 10028-1:2017 - Flat products made of steels for pressure purposes - Part 1: General requirements

EN 10028-2:2017 - Flat products made of steels for pressure purposes - Part 2: Non-alloy and alloy steels with specified elevated temperature properties

EN 10028-3: 2017 - Flat products made of steels for pressure purposes - Part 3: Weldable fine grain steels, normalized

EN 10028-4:2017 - Flat products made of steels for pressure purposes - Part 4: Nickel alloy steels with specified low temperature properties

EN 10028-5:2017 - Flat products made of steels for pressure purposes - Part 5: Weldable fine grain steels, thermomechanically rolled

EN 10028-6:2017 - Flat products made of steels for pressure purposes - Part 6: Weldable fine grain steels, quenched and tempered

EN 10111:2008 - Continuously hot rolled low carbon steel sheet and strip for cold forming - Technical delivery conditions

EN 10120: 2017 - Steel sheet and strip for welded gas cylinders

EN 10149-1:2013 - Hot rolled flat products made of high yield strength steels for cold forming - Part 1: General technical delivery conditions

EN 10149-2: 2013 - Hot rolled flat products made of high yield strength steels for cold forming - Part 2: Technical delivery conditions for thermomechanically rolled steels.

EN 10149-3:2013 - Hot rolled flat products made of high yield strength steels for cold forming - Part 3: Technical delivery conditions for normalized or normalized rolled steels

EN 10207: 2017 - Steels for simple pressure vessels - Technical delivery requirements for plates, strips and bars

EN 10217-1: 2019 - Welded steel tubes for pressure purposes - Technical delivery conditions - Part 1: Electric welded and submerged arc welded non-alloy steel tubes with specified room temperature properties

EN 10217-2: 2019 - Welded steel tubes for pressure purposes - Technical delivery conditions - Part 2: Electric welded non-alloy and alloy steel tubes with specified elevated temperature properties

EN 10217-3: 2019 - Welded steel tubes for pressure purposes - Technical delivery conditions - Part 3: Electric welded and submerged arc welded alloy fine grain steel tubes with specified room, elevated and low temperature properties

EN 10217-4:2019 - Welded steel tubes for pressure purposes - Technical delivery conditions - Part 4: Electric welded non-alloy steel tubes with specified low temperature properties

EN 10217-5:2019 - Welded steel tubes for pressure purposes - Technical delivery conditions - Part 5: Submerged arc welded non-alloy and alloy steel tubes with specified elevated temperature properties

EN 10217-6:2019 - Welded steel tubes for pressure purposes - Technical delivery conditions - Part 6: Submerged arc welded non-alloy steel tubes with specified low temperature properties

EN 10338 - 2015 - Hot rolled and cold rolled non-coated products of multiphase steels for cold forming — Technical delivery conditions

SAE J 403 - 2014 - Chemical Compositions of SAE Carbon Steels

ASTM A36 / A36M - 19 Standard Specification for Carbon Structural Steel.

ASTM A53 /A53M - 22 Standard Specification for Pipe, Steel, Black and Hot-Dipped, Zinc-Coated, Welded and Seamless

ASTM A283 / A283M - 18 Standard Specification for Low and Intermediate Tensile Strength Carbon Steel Plates

ASTM A500 / A500M – 21a Standard Specification for Cold-Formed Welded and Seamless Carbon Steel Structural Tubing in Rounds and Shapes

ASTM A516 / A516M - 17 Standard Specification for Pressure Vessel Plates, Carbon Steel, for Moderate- and Lower-Temperature Service

ASTM A572 / A572M - 21 Standard Specification for High-Strength Low-Alloy Columbium-Vanadium Structural Steel

ASTM A606 / A606M - 18 Standard Specification for Steel, Sheet and Strip, High-Strength, Low-Alloy, Hot-Rolled and Cold-Rolled, with Improved Atmospheric Corrosion Resistance

ASTM A653/A653M-22 - Standard Specification For Steel Sheet, Zinc-Coated (Galvanized) Or Zinc-Iron Alloy-Coated (Galvannealed) By The Hot-Dip Process

ASTM A709 / A709M - 18 Standard Specification for Structural Steel for Bridges

ASTM A786 / 786M - 15 Standard Specification for Hot-Rolled Carbon, Low-Alloy, High-Strength Low-Alloy, and Alloy Steel Floor Plates

ASTM A1011 / A1011M – 18a Standard Specification for Steel, Sheet and Strip, Hot-Rolled, Carbon, Structural, High-Strength Low-Alloy, High-Strength Low-Alloy with Improved Formability, and Ultra-High Strength

ASTM A1018 / A1018M – 18 Standard Specification for Steel, Sheet and Strip, Heavy-Thickness Coils, Hot-Rolled, Carbon, Commercial, Drawing, Structural, High-Strength Low-Alloy, High-Strength Low-Alloy with Improved Formability, and Ultra-High Strength

ABS-2: 2023 - American Bureau of Shipping - Rules for Materials and Welding January 2023 Part 2

AS NZS 1594: 2002 (2016) Structural steel - Hot-rolled plates, floorplates and slabs

CSA G40.20 - G40.21: 2013 (R2018) General requirements for rolled or welded structural quality steel / Structural quality steel

JIS G 3101: 2020 Rolled Steels for general structure

JIS G 3106: 2020 Rolled Steels for welded structure

JIS G 3125: 2021 Superior atmospheric corrosion resisting rolled steels

JIS G 3131: 2018 Hot-rolled mild steel plates, sheets and strips

JIS G 3132: 2018 Hot-rolled carbon steel strip for pipes and tubes

DIN 1614-1: 1986 Steel flat products - hot rolled sheet and strip – Technical delivery conditions – Mild unalloyed steels for cold reducing

DIN EN 10111:2008 Continuously hot rolled low carbon steel sheet and strip for cold forming

API 5L: 46<sup>th</sup> Edition 2018 - Specification for Line Pipe

API 5CT: 10<sup>th</sup> Edition 2018 Addendum 1: 2021 - Specification for Casing and Tubing

ISO 3183:2019 - Petroleum And Natural Gas Industries - Steel Pipe For Pipeline Transportation Systems