



# Environmental Product Declaration

## Statement of Verification

CARES EPD No.: 0056

Issue 01

This is to verify that the **Environmental Product Declaration**

Provided by:  
Southern Steel Mesh Sdn Bhd

Is in accordance with the requirements of:  
ISO 14025:2010 and EN 15804:2012 + A2:2019/AC2021  
and CARES PCR for Type III EPD of Semi-Finished and Finished  
Steel Products, February 2025

This declaration is for: 1 tonne of hard drawn steel wire and 1 tonne of steel welded mesh  
manufactured by the secondary (scrap based) and primary production route (iron ore)



## Company address:

No.5, Jalan Utas 15/7,  
Seksyen 15,  
40200 Shah Alam  
Selangor  
Malaysia



*LadinCamci*

Ladin Camci

02 April 2026

Signed for CARES

Operator

Date of this Issue

02 April 2026

01 April 2029

First Issue Date

Expiry Date

The validity of this Environmental Product Declaration can be verified by contacting CARES on +44 (0)1732 450 000 or  
visiting CARES website <https://www.carescertification.com/certification-schemes/environmental-product-declarations>.

CARES, Pembroke House, 21 Pembroke Road, Sevenoaks, Kent TN13 1XR



# Environmental Product Declaration

## Environmental Product Declaration

EPD Number: CARES EPD 0056

### General Information

<b>EPD Programme Operator</b>	CARES Pembroke House, 21 Pembroke Road, Sevenoaks, Kent, TN13 1XR UK <a href="http://www.carescertification.com">www.carescertification.com</a>
<b>Applicable Product Category Rules</b>	CARES Product Category Rules (PCR) for Type III Environmental Product Declaration (EPD) of Semi-Finished and Finished Steel Products, February 2025
<b>Commissioner of LCA study</b>	CARES Pembroke House, 21 Pembroke Road, Sevenoaks, Kent, TN13 1XR UK <a href="http://www.carescertification.com">www.carescertification.com</a>
<b>LCA consultant/Tool</b>	CARES EPD Tool version 3.0 SPHERA SOLUTIONS UK LIMITED The Innovation Centre Warwick Technology Park, Gallows Hill, Warwick, Warwickshire CV34 6UW UK <a href="http://www.sphera.com">www.sphera.com</a>
<b>Declared/Functional Unit</b>	1 tonne of hard drawn steel wire and 1 tonne of steel welded mesh manufactured by the secondary (scrap based) and primary production route (iron ore)
<b>Applicability/Coverage</b>	Product Average as an average from plants of a certain number of manufacturers within an association. Calculated as a mean of manufacturing output
<b>EPD Type</b>	Cradle to Gate with options, Modules C1-C4, and Module D
<b>Background database</b>	MLC (GaBi) Databases 2025.1 (Sphera, 2025)

### Demonstration of Verification

CEN standard EN 15804 serves as the core PCR <sup>a</sup>

Independent verification of the declaration and data according to EN ISO 14025:2010

Internal  External

(Where appropriate <sup>b</sup>) Third party verifier:  
Dr Jane Anderson

a: Product category rules

b: Optional for business-to-business communication; mandatory for business-to-consumer communication (see EN ISO 14025:2010, 9.4)



# Environmental Product Declaration

## Comparability

Environmental product declarations from different programmes may not be comparable if not compliant with EN 15804:2012+A2:2019/AC2021. Comparability is further dependent on the specific product category rules, system boundaries and allocations, and background data sources. See Clause 5.3 of EN 15804:2012+A2:2019/AC2021 for further guidance

## Information modules covered

Product Stage			Construction Stage		Use Stage							End-of-life Stage				Benefits and loads beyond the system boundary
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Raw materials supply	Transport	Manufacturing	Transport to site	Construction – Installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	Deconstruction demolition	Transport	Waste processing	Disposal	Reuse, Recovery and/or Recycling potential
✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

Note: Checks indicate the Information Modules declared.

## Manufacturing sites

Southern Steel Mesh Sdn. Bhd.  
 Site 1:  
 5 1/2 Miles, Jalan Kapar  
 42100 Klang  
 Selangor  
 Malaysia

Southern Steel Mesh Sdn. Bhd.  
 Site 2:  
 2489, Lorong Perusahaan 12, Prai Industrial Estate  
 13600 Prai  
 Pulau Pinang  
 Malaysia

## Construction Product:

### Product Description

#### Hard-Drawn Steel Wire

Hard-drawn carbon steel wire manufactured by cold drawing of carbon steel wire rod. The wire rod is produced by hot rolling of continuously cast billets from either the electric arc furnace (EAF) or blast furnace/basic oxygen furnace (BF/BOF) production routes. The product is supplied in various diameters and grades in accordance with the product standards listed in the References section.

Typical applications: tensile reinforcement in welded fabric and ancillary reinforcement for reinforced concrete elements.

#### Steel Welded Mesh (Fabric)

Steel welded fabric manufactured by automatic resistance welding of longitudinal and transverse hard-drawn or cold-rolled wires into square or rectangular grids. The welding process is electronically controlled to achieve fusion of intersecting wires. The wires used comply with the applicable product standards listed in the References section.

Typical applications: tensile reinforcement in reinforced concrete slabs, walls and other reinforced concrete elements.



# Environmental Product Declaration

## Technical Information

1) CARES BF-BOF manufacturing route average including internal and external scrap

Property	Value, Unit
Production route	Hybrid (Scrap-EAF & Iron ore – BF)
Density	7850 kg/m <sup>3</sup>
Weldability (C <sub>eq</sub> ) (as per MS 144:2014)	max 0.42 %
Yield strength (as per MS 144:2014)	min 500 N/mm <sup>2</sup>
Tensile/Yield strength ratio (as per MS 144:2014)	min 1.02 for < 8 mm diameter min 1.05 for ≥ 8 mm diameter
Agt (% total elongation at maximum force as per MS 144:2014)	min 5 %
Surface geometry (Relative rib area, fR as per MS 144:2014)	min 0.040 for Bar Size >6mm & ≤12mm & min 0.056 for Bar size >12
Bend and Re-bend test (as per MS 144:2014)	Pass
Shear force of welded joints (as per MS 144:2014 for mesh)	> 0.25 x Yield Strength x Nominal cross-sectional area
Recycled content (as per ISO 14021:2016/Amd:2021)	47.6 (Hard Drawn Steel Wire) 37.6 (Steel Welded Mesh)

\* Technical Information details are as per relevant product standards listed in References section.

## Main Product Contents

Material/Chemical Input	%
Fe	97
C, Mn, Si, V, Ni, Cu, Cr, Mo and others	3

## Manufacturing Process

Hard-drawn steel wire — LCA modelling scope:

The assessment covers upstream production of steel and hot-rolled wire rod from continuously cast billets (via EAF and/or BF/BOF routes), including raw materials and energy supply, followed by inbound transport of wire rod to the drawing site. Manufacturing at the site comprises descaling and surface preparation, cold drawing through one or more dies and rolls to the specified diameters and properties, straightening and cutting or coiling, in-process quality control, packaging. Finished hard drawn wires are coiled and packaged for transport. Steel straps and ties used for the binding of packages do not include any biogenic materials.

Downstream, the model covers transportation of finished hard drawn wire to fabricators or construction sites. For this product, fabrication prior to installation (such as cutting, bending, downstream manufacturing of welded mesh and other reinforcement products) is included within the downstream scope.

Steel welded mesh (fabric) — LCA modelling scope:

The assessment covers upstream production of steel and hot-rolled wire rod from continuously cast billets (via EAF and/or BF/BOF routes), including raw materials and energy supply, followed by inbound transport of wire rod to the drawing site. Manufacturing at the site includes (where performed) wire drawing, wire straightening and cutting, automatic resistance welding of longitudinal and transverse wires into square or rectangular grids, subsequent cutting/flattening, in-process quality control, packaging, and segregation of internal offcuts for recycling; all relevant consumables, emissions controls and utilities are included. Finished steel welded mesh is packaged for transport. Steel straps and ties used for the binding of packages do not include any biogenic materials.


Downstream coverage includes transportation of finished sheets to the construction site and construction-stage activities.




# Environmental Product Declaration

## Process flow diagrams

Hard Drawn Steel Wire Manufacturing Process

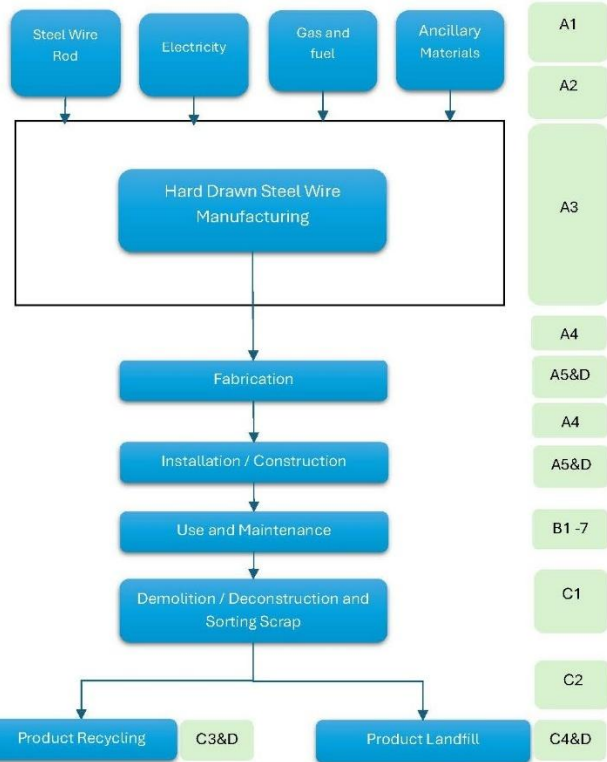

Steel Welded Mesh (Fabric) Manufacturing Process

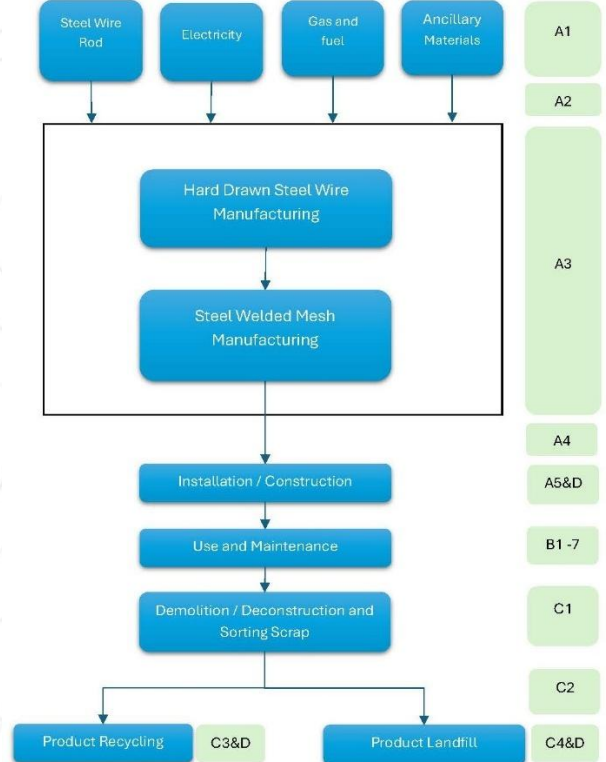

## Construction Installation

Processing and proper use of hard drawn steel wire and steel welded mesh products depends on the application and should be made in accordance with generally accepted practices, standards and manufacturing recommendations.

During transport and storage of hard drawn steel wire and steel welded mesh products the usual requirement for the special care for securing loads is to be observed.

## Use Information

The composition of the hard drawn steel wire and steel welded mesh products does not change during use.

Hard drawn steel wire and steel welded mesh products do not cause adverse health effects under normal conditions of use.

No risks to the environment and living organisms are known to result from the mechanical destruction of the hard drawn steel wire and steel welded mesh products itself.

## End of Life

Hard drawn steel wire and steel welded steel mesh products are not reused at end of life but can be recycled to the same (or higher/lower) quality of steel depending upon the metallurgy and processing of the recycling route.

It is a high value resource, so efforts are made to recycle steel scrap rather than disposing of it at EoL. A recycling rate of 92% is typical for hard drawn steel wire and steel welded mesh products.



## Life Cycle Assessment Calculation Rules

This EPD uses the "Cut-off by Classification" method, also known as the recycled content method. It assigns the environmental impacts of primary material production to the initial user. Recyclable materials enter the recycling process without burdens, and secondary materials only bear the impacts of recycling.

This method promotes recycling by making producers responsible for waste management. It supports a circular economy by reducing the environmental impacts of primary material production.

This approach follows ISO 14040 and ISO 14044 standards for Life Cycle Assessments.

The Life Cycle Impact Assessment (LCIA) has been carried out using the characterisation method described in EN 15804+A2. For all indicators the characterisation factors from the Environmental Footprint v3.1 (EF 3.1) was applied.

## Declared unit description

1 tonne of hard drawn steel wire and 1 tonne of steel welded mesh manufactured by the secondary (scrap based) and primary production route (iron ore).

## System boundary

The system boundary of the EPD follows the modular design defined by EN 15804:2012+A2:2019/AC2021. Type of this EPD is Cradle to Gate with options, Modules, C1-C4, and module D.

(For hard drawn steel wire, downstream fabrication prior to installation is included in A5; for welded steel mesh, on-site wire drawing, if performed, and mesh welding are included in A3; site placement/trimming in A5)

Impacts and aspects related to losses/wastage (i.e. production, transport and waste processing and end-of-life stage of lost waste products and materials) are considered in the modules in which the losses/wastage occur.

Once steel scrap has been collected for recycling it is considered to have reached the end of waste state.

## Data sources, quality and allocation

Data Sources and Quality:

The selection of data and the data quality requirements have been provided according to the requirements of BS EN 15941:2024.

Data Sources: Manufacturing data of the hard drawn steel wire and steel welded mesh products for the prestressing of concrete covering the period 01/01/2024 - 31/12/2024 has been provided by Southern Steel Mesh Sdn Bhd operating on the geographical area noted in Manufacturing Site. The LCA results for each product represent a weighted average of the production data from both sites (Site 1: Selangor and Site 2: Pulau) based on the total production mass (tonnes) of each respective product at each site during the reference period. Carbon steel wire rods used in the production of hard drawn steel wire and steel welded mesh were purchased from external suppliers which are using the secondary (scrap based) and primary production route (iron ore based).

A brief description of technology and inputs for the products are given in simplified Process Flow Diagrams describing the manufacture of hard drawn steel wire and steel welded mesh individually.

The primary data collection was thorough, considering all relevant flows and these data were verified by CARES, including also the verification of mass balance, to ensure that data for all the inputs and outputs for the process over the period of data collection have been collected, and that the unit process data will comply with the cut-off rules of EN 15804:2012+A2:2019/AC2021. The EPD covers transport to, and end-of-life in Malaysia.

The selection of the background data for electricity generation is in line with the CARES PCR 2025. Country or region-specific power grid mixes are selected from MLC (GaBi) Databases 2025.1 (Sphera, 2025); thus, consumption grid mix of Malaysia has been selected to suit specific manufacturing location, and also for fabrication, installation and demolishing location. The emission factor of carbon footprint of the applied consumption grid mix of Malaysia is 0.778 kg CO<sub>2</sub> eq/kWh.

Data Quality: Background data is consistently sourced from the MLC (GaBi) Databases 2025.1 (Sphera, 2025). The primary data collection was thorough, considering all relevant flows and these data have been verified during the audit conducted by CARES in July 2025.



# Environmental Product Declaration

There isn't any data from different LCI/LCA databases are used considering that the overall consistency of the study is not adversely affected.

Schemes applied for data quality assessment was as per EN 15804:2012+A2:2019/AC2021 , Annex E, Table E.1 — Data quality level and criteria of the UN Environment Global Guidance on LCA database development . No poor or very poor data was found during the assessment of relevant data.

Data quality level and criteria of the UN Environment Global Guidance on LCA database development:

Geographical Representativeness	: Good
Technical Representativeness	: Very good
Time Representativeness	: Good

Allocation:

Allocation is not applied because the hard-drawn wire and welded mesh systems are single-output and no co-products arise. Process scrap and offcuts are either recycled internally within manufacturing or, when collected for external recycling, are treated as having reached the end-of-waste state; any potential benefits/loads are reported in Module D and are not aggregated with Modules A to C. This approach follows ISO 14044:2006 Clause 4.3.4.2 (avoid allocation where possible) and EN 15804:2012+A2:2019/AC:2021 Clause 6.3.6 allocation principles, as implemented by the CARES PCR and CARES programme guidance.

## Cut-off criteria

On the input side all flows entering the system and comprising more than 1% in total mass or contributing more than 1% to primary energy consumption are considered. All inputs used as well as all process-specific waste and process emissions were assessed. For this reason, material streams which were below 1% (by mass) were captured as well. In this manner the cut-off criteria according to the PCR requirements are fulfilled).



# Environmental Product Declaration

## LCA Results - Hard drawn steel wire

(ND = module not declared; MNR = module not relevant; INA = indicator not assessed; AGG = aggregated)

Core environmental impact indicators									
Life Cycle Stage	Impact Category		GWP-total	GWP-fossil	GWP-biogenic	GWP-luluc	ODP	AP	EP-freshwater
			kg CO <sub>2</sub> eq	kg CO <sub>2</sub> eq	kg CO <sub>2</sub> eq	kg CO <sub>2</sub> eq	kg CFC11 eq	mol H <sup>+</sup> eq	Kg P eq
Product stage	Raw material supply	A1	1.68E+03	1.68E+03	2.09	0.933	3.32E-07	6.08	1.25E-03
	Transport	A2	20.7	20.6	0.039	0.217	2.49E-12	0.031	5.70E-05
	Manufacturing	A3	29.9	29.5	0.350	0.047	4.32E-11	0.13	9.33E-06
	Total (of product stage)	A1-3	1.73E+03	1.73E+03	2.48	1.20	3.32E-07	6.24	1.32E-03
Construction process stage	Transport	A4	25.2	24.9	0.048	0.264	3.02E-12	0.038	6.92E-05
	Construction	A5	36.2	36.0	0.052	3.88E-02	6.66E-09	0.128	3.03E-05
Use stage	Use	B1	0	0	0	0	0	0	0
	Maintenance	B2	0	0	0	0	0	0	0
	Repair	B3	0	0	0	0	0	0	0
	Replacement	B4	0	0	0	0	0	0	0
	Refurbishment	B5	0	0	0	0	0	0	0
	Operational energy use	B6	0	0	0	0	0	0	0
	Operational water use	B7	0	0	0	0	0	0	0
<b>%92 Recycling / %8 Landfill Scenario</b>									
End of life	Deconstruction, demolition	C1	2.09	2.09	8.33E-04	6.83E-05	1.62E-13	0.012	2.52E-07
	Transport	C2	48.4	47.8	0.090	0.477	5.75E-12	0.120	1.26E-04
	Waste processing	C3	0	0	0	0	0	0	0
	Disposal	C4	1.23	1.22	3.96E-05	0.005	3.40E-12	0.009	1.82E-06
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	-7.00E+02	-7.00E+02	0.267	-0.392	-3.46E-10	-1.70	-2.70E-04
<b>100% Landfill Scenario</b>									
End of life	Deconstruction, demolition	C1	2.09	2.09	8.33E-04	6.83E-05	1.62E-13	0.012	2.52E-07
	Transport	C2	2.23	2.20	0.004	0.023	2.67E-13	0.003	6.11E-06
	Waste processing	C3	0	0	0	0	0	0	0
	Disposal	C4	15.3	15.3	4.95E-04	0.063	4.25E-11	0.108	2.27E-05
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	1.13E+03	1.13E+03	-0.16	0.500	5.87E-10	2.50	3.69E-04
<b>100% Recycling Scenario</b>									
End of life	Deconstruction, demolition	C1	2.09	2.09	8.33E-04	6.83E-05	1.62E-13	0.012	2.52E-07
	Transport	C2	52.4	51.8	0.097	0.516	6.22E-12	0.131	1.36E-04
	Waste processing	C3	0	0	0	0	0	0	0
	Disposal	C4	0	0	0	0	0	0	0
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	-8.59E+02	-8.59E+02	0.304	-0.470	-4.27E-10	-2.07	-3.25E-04

GWP-total = Global warming potential, total;  
 GWP-fossil = Global warming potential, fossil;  
 GWP-biogenic = Global warming potential, biogenic;  
 GWP-luluc = Global warming potential, land use and land use change;

ODP = Depletion potential of the stratospheric ozone layer;  
 AP = Acidification potential, accumulated exceedance; and  
 EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment



# Environmental Product Declaration

## LCA Results - Hard drawn steel wire (cont.)

(ND = module not declared; MNR = module not relevant; INA = indicator not assessed; AGG = aggregated)

Core environmental impact indicators								
Life Cycle Stage	Impact Category		EP-marine	EP-terrestrial	POCP	ADP-mineral & metals	ADP-fossil	WDP
			kg N eq	mol N eq	kg NMVOC eq	kg Sb eq	MJ, net calorific value	m <sup>3</sup> world eq deprived
Product stage	Raw material supply	A1	1.35	13.1	3.90	8.28E-05	1.58E+04	70.4
	Transport	A2	0.013	0.134	0.027	1.40E-06	2.69E+02	0.085
	Manufacturing	A3	0.041	0.451	0.112	7.77E-07	3.38E+02	0.242
	Total (of product stage)	A1-3	1.41	13.7	4.04	8.49E-05	1.64E+04	70.8
Construction process stage	Transport	A4	0.015	0.163	0.033	1.70E-06	327	0.103
	Construction	A5	0.030	0.290	0.084	1.80E-06	3.47E+02	1.43
Use stage	Use	B1	0	0	0	0	0	0
	Maintenance	B2	0	0	0	0	0	0
	Repair	B3	0	0	0	0	0	0
	Replacement	B4	0	0	0	0	0	0
	Refurbishment	B5	0	0	0	0	0	0
	Operational energy use	B6	0	0	0	0	0	0
	Operational water use	B7	0	0	0	0	0	0
<b>%92 Recycling / %8 Landfill Scenario</b>								
End of life	Deconstruction, demolition	C1	0.004	0.045	0.011	2.94E-08	27.7	0.016
	Transport	C2	0.054	0.580	0.129	3.15E-06	626	0.191
	Waste processing	C3	0	0	0	0	0	0
	Disposal	C4	0.002	0.025	0.007	7.57E-08	16.0	0.132
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	-0.395	-4.25	-1.32	-6.74E-04	-5.41E+03	-14.2
<b>100% Landfill Scenario</b>								
End of life	Deconstruction, demolition	C1	0.004	0.045	0.011	2.94E-08	27.7	0.016
	Transport	C2	0.001	0.015	0.003	1.50E-07	28.8	0.009
	Waste processing	C3	0	0	0	0	0	0
	Disposal	C4	0.028	0.308	0.085	9.46E-07	200	1.65
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	0.616	6.63	2.08	-6.56E-04	8.44E+03	-1.32
<b>100% Recycling Scenario</b>								
End of life	Deconstruction, demolition	C1	0.004	0.045	0.011	2.94E-08	27.7	0.016
	Transport	C2	0.058	0.630	0.129	3.41E-06	678	0.207
	Waste processing	C3	0	0	0	0	0	0
	Disposal	C4	0	0	0.007	0	0	0
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	-0.483	-5.20	-1.32	-6.75E-04	-6.62E+03	-15.3

ADP-mineral&metals = Abiotic depletion potential for non-fossil resources;  
 ADP-fossil = Depletion potential of the stratospheric ozone layer;  
 WDP = Water (user) deprivation potential, deprivation-weighted water consumption.  
 The results of the three environmental impact indicators above shall be used with care as the uncertainties on these results are high or as there is limited experienced with these indicators.

EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment;  
 EP-terrestrial = Eutrophication potential, accumulated exceedance;  
 POCP = Formation potential of tropospheric ozone;  
 PM = Particulate matter.



# Environmental Product Declaration

## LCA Results - Hard drawn steel wire (cont.)

(ND = module not declared; MNR = module not relevant; INA = indicator not assessed; AGG = aggregated)

### Parameters describing environmental impacts

Life Cycle Stage	Impact Category		PM	IRP	ETP-fw	HTP-c	HTP-nc	SQP
			disease incidence	kBq U <sup>235</sup> eq	CTUe	CTUh	CTUh	dimensionless
Product stage	Raw material supply	A1	8.05E-05	13.7	2.83E+03	1.84E-06	7.54E-06	1.10E+03
	Transport	A2	3.07E-07	0.049	3.49E+02	4.70E-09	2.65E-07	119
	Manufacturing	A3	1.10E-06	0.028	5.71E+01	2.55E-08	2.62E-06	22.4
	Total (of product stage)	A1-3	8.19E-05	13.8	3.24E+03	1.87E-06	1.04E-05	1.24E+03
Construction process stage	Transport	A4	3.73E-07	0.060	4.24E+02	5.70E-09	3.22E-07	145
	Construction	A5	1.67E-06	0.280	89.3	3.77E-08	2.27E-07	32.9
Use stage	Use	B1	0	0	0	0	0	0
	Maintenance	B2	0	0	0	0	0	0
	Repair	B3	0	0	0	0	0	0
	Replacement	B4	0	0	0	0	0	0
	Refurbishment	B5	0	0	0	0	0	0
	Operational energy use	B6	0	0	0	0	0	0
	Operational water use	B7	0	0	0	0	0	0
<b>%92 Recycling / %8 Landfill Scenario</b>								
End of life	Deconstruction, demolition	C1	7.82E-08	5.77E-04	32.9	5.92E-10	7.53E-09	0.036
	Transport	C2	1.45E-06	0.113	7.92E+02	1.07E-08	5.87E-07	262
	Waste processing	C3	0	0	0	0	0	0
	Disposal	C4	1.08E-07	0.019	13.8	2.13E-10	7.98E-09	3.96
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	-2.60E-05	8.70	-9.48E+02	-1.42E-06	7.06E-07	3.77E+02
<b>100% Landfill Scenario</b>								
End of life	Deconstruction, demolition	C1	7.82E-08	5.77E-04	32.9	5.92E-10	7.53E-09	0.036
	Transport	C2	3.23E-08	0.005	37.4	5.03E-10	2.84E-08	12.8
	Waste processing	C3	0	0	0	0	0	0
	Disposal	C4	1.35E-06	0.235	173	2.67E-09	9.98E-08	49.5
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	3.60E-05	-15.3	1.21E+03	1.49E-06	-1.50E-06	-7.44E+02
<b>100% Recycling Scenario</b>								
End of life	Deconstruction, demolition	C1	7.82E-08	5.77E-04	32.9	5.92E-10	7.53E-09	0.036
	Transport	C2	1.57E-06	0.123	858	1.16E-08	6.36E-07	284
	Waste processing	C3	0	0	0	0	0	0
	Disposal	C4	0	0	0	0	0	0
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	-3.14E-05	10.8	-1.14E+03	-1.68E-06	8.99E-07	4.74E+02

IRP = Potential human exposure efficiency relative to U235; This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator.

HTP-nc = Potential comparative toxic unit for humans; and ETP-fw = Potential comparative toxic unit for ecosystems; HTP-c = Potential comparative toxic unit for humans; SQP = Potential soil quality index.

The results of the four environmental impact indicators above shall be used with care as the uncertainties on these results are high or as there is limited experience with these indicators.



# Environmental Product Declaration

## LCA Results - Hard drawn steel wire (cont.)

(ND = module not declared; MNR = module not relevant; INA = indicator not assessed; AGG = aggregated)

### Parameters describing resource use

Life Cycle Stage	Impact Category		PERE	PERM	PERT	PENRE	PENRM	PENRT
			MJ	MJ	MJ	MJ	MJ	MJ
Product stage	Raw material supply	A1	2.45E+03	0	2.45E+03	1.96E+04	0	1.96E+04
	Transport	A2	19.7	0	19.7	2.69E+02	0	2.69E+02
	Manufacturing	A3	43.5	0	43.5	3.38E+02	0	3.38E+02
	Total (of product stage)	A1-3	2.51E+03	0	2.51E+03	2.02E+04	0	2.02E+04
Construction process stage	Transport	A4	24	0	24.0	3.27E+02	0	3.27E+02
	Construction	A5	51.7	0	51.7	4.22E+02	0	4.22E+02
Use stage	Use	B1	0	0	0	0	0	0
	Maintenance	B2	0	0	0	0	0	0
	Repair	B3	0	0	0	0	0	0
	Replacement	B4	0	0	0	0	0	0
	Refurbishment	B5	0	0	0	0	0	0
	Operational energy use	B6	0	0	0	0	0	0
	Operational water use	B7	0	0	0	0	0	0
<b>%92 Recycling / %8 Landfill Scenario</b>								
End of life	Deconstruction, demolition	C1	0.056	0	0.056	27.7	0	27.7
	Transport	C2	43.6	0	43.6	626	0	626
	Waste processing	C3	0	0	0	0	0	0
	Disposal	C4	3.09	0	3.09	16	0	16
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	7.56E+02	0	7.56E+02	-5.41E+03	0	-5.41E+03
<b>100% Landfill Scenario</b>								
End of life	Deconstruction, demolition	C1	0.056	0	0.056	27.7	0	27.7
	Transport	C2	2.12	0	2.12	28.8	0	28.8
	Waste processing	C3	0	0	0	0	0	0
	Disposal	C4	38.7	0	38.7	200	0	200
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	-1.43E+03	0	-1.43E+03	8.44E+03	0	8.44E+03
<b>100% Recycling Scenario</b>								
End of life	Deconstruction, demolition	C1	0.056	0	0.056	27.7	0	27.7
	Transport	C2	47.2	0	47.2	678	0	678
	Waste processing	C3	0	0	0	0	0	0
	Disposal	C4	0	0	0	0	0	0
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	9.46E+02	0	9.46E+02	-6.62E+03	0	-6.62E+03

PERE = Use of renewable primary energy excluding renewable primary energy used as raw materials;  
 PERM = Use of renewable primary energy resources used as raw materials;  
 PERT = Total use of renewable primary energy resources;

PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials;  
 PENRM = Use of non-renewable primary energy resources used as raw materials;  
 PENRT = Total use of non-renewable primary energy resource



# Environmental Product Declaration

## LCA Results - Hard drawn steel wire (cont.)

(ND = module not declared; MNR = module not relevant; INA = indicator not assessed; AGG = aggregated)

Parameters describing resource use						
Life Cycle Stage	Impact Category		SM	RSF	NRSF	FW
			kg	MJ net calorific value	MJ net calorific value	m <sup>3</sup>
Product stage	Raw material supply	A1	591	0	0	2.77
	Transport	A2	0	0	0	0.010
	Manufacturing	A3	0	0	0	0.076
	Total (of product stage)	A1-3	591	0	0	2.86
Construction process stage	Transport	A4	0	0	0	0.012
	Construction	A5	11.8	0	0	0.058
Use stage	Use	B1	0	0	0	0
	Maintenance	B2	0	0	0	0
	Repair	B3	0	0	0	0
	Replacement	B4	0	0	0	0
	Refurbishment	B5	0	0	0	0
	Operational energy use	B6	0	0	0	0
	Operational water use	B7	0	0	0	0
<b>%92 Recycling / %8 Landfill Scenario</b>						
End of life	Deconstruction, demolition	C1	0	0	0	4.04E-04
	Transport	C2	0	0	0	0.021
	Waste processing	C3	0	0	0	0
	Disposal	C4	0	0	0	0.004
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	938	0	0	-0.779
<b>100% Landfill Scenario</b>						
End of life	Deconstruction, demolition	C1	0	0	0	4.04E-04
	Transport	C2	0	0	0	1.02E-03
	Waste processing	C3	0	0	0	0
	Disposal	C4	0	0	0	0.048
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	0	0	0	0.283
<b>100% Recycling Scenario</b>						
End of life	Deconstruction, demolition	C1	0	0	0	4.04E-04
	Transport	C2	0	0	0	0.023
	Waste processing	C3	0	0	0	0
	Disposal	C4	0	0	0	0
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	1.02E+03	0	0	-0.871

SM = Use of secondary material;  
RSF = Use of renewable secondary fuels;

NRSF = Use of non-renewable secondary fuels;  
FW = Net use of fresh water



# Environmental Product Declaration

## LCA Results - Hard drawn steel wire (cont.)

(ND = module not declared; MNR = module not relevant; INA = indicator not assessed; AGG = aggregated)

### Other environmental information describing waste categories

Life Cycle Stage	Impact Category		HWD	NHWD	RWD
			kg	kg	kg
Product stage	Raw material supply	A1	1.97E-06	52.4	0.113
	Transport	A2	9.74E-09	0.035	3.54E-04
	Manufacturing	A3	7.30E-09	0.284	2.17E-04
	Total (of product stage)	A1-3	1.99E-06	52.7	0.114
Construction process stage	Transport	A4	1.18E-08	0.043	4.30E-04
	Construction	A5	4.06E-08	2.66	0.002
Use stage	Use	B1	0	0	0
	Maintenance	B2	0	0	0
	Repair	B3	0	0	0
	Replacement	B4	0	0	0
	Refurbishment	B5	0	0	0
	Operational energy use	B6	0	0	0
	Operational water use	B7	0	0	0
<b>%92 Recycling / %8 Landfill Scenario</b>					
End of life	Deconstruction, demolition	C1	4.71E-10	0.004	7.85E-06
	Transport	C2	2.26E-08	0.081	8.18E-04
	Waste processing	C3	0	0	0
	Disposal	C4	3.51E-09	80.1	1.70E-04
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	-2.58E-03	-10.2	0.083
<b>100% Landfill Scenario</b>					
End of life	Deconstruction, demolition	C1	4.71E-10	0.004	7.85E-06
	Transport	C2	1.04E-09	0.004	3.80E-05
	Waste processing	C3	0	0	0
	Disposal	C4	4.38E-08	1.00E+03	0.002
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	-2.59E-03	17.9	-0.147
<b>100% Recycling Scenario</b>					
End of life	Deconstruction, demolition	C1	4.71E-10	0.004	7.85E-06
	Transport	C2	2.45E-08	0.087	8.86E-04
	Waste processing	C3	0	0	0
	Disposal	C4	0	0	0
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	-2.58E-03	-12.6	0.103

HWD = Hazardous waste disposed;  
 NHWD = Non-hazardous waste disposed;  
 RWD = Radioactive waste disposed



# Environmental Product Declaration

## LCA Results - Hard drawn steel wire (cont.)

(ND = module not declared; MNR = module not relevant; INA = indicator not assessed; AGG = aggregated)

### Other environmental information describing output flows – at end of life

Life Cycle Stage	Impact Category		CRU	MFR	MER	EE
			kg	kg	kg	MJ per energy carrier
Product stage	Raw material supply	A1	0	0	0	0
	Transport	A2	0	0	0	0
	Manufacturing	A3	0	0	0	0
	Total (of product stage)	A1-3	0	0	0	0
Construction process stage	Transport	A4	0	0	0	0
	Construction	A5	0	18.4	0	0
Use stage	Use	B1	0	0	0	0
	Maintenance	B2	0	0	0	0
	Repair	B3	0	0	0	0
	Replacement	B4	0	0	0	0
	Refurbishment	B5	0	0	0	0
	Operational energy use	B6	0	0	0	0
	Operational water use	B7	0	0	0	0
<b>%92 Recycling / %8 Landfill Scenario</b>						
End of life	Deconstruction, demolition	C1	0	920	0	0
	Transport	C2	0	0	0	0
	Waste processing	C3	0	0	0	0
	Disposal	C4	0	0	0	0
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	0	0	0	0
<b>100% Landfill Scenario</b>						
End of life	Deconstruction, demolition	C1	0	0	0	0
	Transport	C2	0	0	0	0
	Waste processing	C3	0	0	0	0
	Disposal	C4	0	0	0	0
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	0	0	0	0
<b>100% Recycling Scenario</b>						
End of life	Deconstruction, demolition	C1	0	1.00E+03	0	0
	Transport	C2	0	0	0	0
	Waste processing	C3	0	0	0	0
	Disposal	C4	0	0	0	0
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	0	0	0	0

CRU = Components for reuse;  
MFR = Materials for recycling

MER = Materials for energy recovery;  
EE = Exported Energy



# Environmental Product Declaration

## LCA Results – Steel Welded Mesh

(ND = module not declared; MNR = module not relevant; INA = indicator not assessed; AGG = aggregated)

Core environmental impact indicators									
Life Cycle Stage	Impact Category		GWP-total	GWP-fossil	GWP-biogenic	GWP-luluc	ODP	AP	EP-freshwater
			kg CO <sub>2</sub> eq	kg CO <sub>2</sub> eq	kg CO <sub>2</sub> eq	kg CO <sub>2</sub> eq	kg CFC11 eq	mol H <sup>+</sup> eq	Kg P eq
Product stage	Raw material supply	A1	1.87E+03	1.87E+03	2.48	1.06	2.38E-07	5.89	1.41E-03
	Transport	A2	16.0	15.9	0.029	0.155	1.89E-12	0.064	4.09E-05
	Manufacturing	A3	70.0	69.0	0.831	0.168	1.01E-10	0.331	3.40E-05
	Total (of product stage)	A1-3	1.95E+03	1.95E+03	3.34	1.39	2.38E-07	6.28	1.49E-03
Construction process stage	Transport	A4	18.0	17.8	0.034	0.189	2.16E-12	0.027	4.94E-05
	Construction	A5	39.3	39.2	0.055	0.038	4.76E-09	0.123	3.26E-05
Use stage	Use	B1	0	0	0	0	0	0	0
	Maintenance	B2	0	0	0	0	0	0	0
	Repair	B3	0	0	0	0	0	0	0
	Replacement	B4	0	0	0	0	0	0	0
	Refurbishment	B5	0	0	0	0	0	0	0
	Operational energy use	B6	0	0	0	0	0	0	0
	Operational water use	B7	0	0	0	0	0	0	0
<b>%92 Recycling / %8 Landfill Scenario</b>									
End of life	Deconstruction, demolition	C1	2.09	2.09	8.33E-04	6.83E-05	1.62E-13	0.012	2.52E-07
	Transport	C2	48.4	47.8	0.090	0.477	5.75E-12	0.120	1.26E-04
	Waste processing	C3	0	0	0	0	0	0	0
	Disposal	C4	1.23	1.22	3.96E-05	0.005	3.40E-12	0.009	1.82E-06
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	-8.96E+02	-8.95E+02	0.243	-0.454	-4.53E-10	-2.09	-3.21E-04
<b>100% Landfill Scenario</b>									
End of life	Deconstruction, demolition	C1	2.09	2.09	8.33E-04	6.83E-05	1.62E-13	0.012	2.52E-07
	Transport	C2	2.23	2.20	0.004	0.023	2.67E-13	0.003	6.11E-06
	Waste processing	C3	0	0	0	0	0	0	0
	Disposal	C4	15.3	15.3	4.95E-04	0.063	4.25E-11	0.108	2.27E-05
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	9.42E+02	9.42E+02	-0.186	0.443	4.85E-10	2.14	3.21E-04
<b>100% Recycling Scenario</b>									
End of life	Deconstruction, demolition	C1	2.09	2.09	8.33E-04	6.83E-05	1.62E-13	0.012	2.52E-07
	Transport	C2	52.4	51.8	0.097	0.516	6.22E-12	0.131	1.36E-04
	Waste processing	C3	0	0	0	0	0	0	0
	Disposal	C4	0	0	0	0	0	0	0
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	-1.06E+03	-1.06E+03	0.280	-0.532	-5.34E-10	-2.46	-3.77E-04

GWP-total = Global warming potential, total;  
 GWP-fossil = Global warming potential, fossil;  
 GWP-biogenic = Global warming potential, biogenic;  
 GWP-luluc = Global warming potential, land use and land use change;

ODP = Depletion potential of the stratospheric ozone layer;  
 AP = Acidification potential, accumulated exceedance; and  
 EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment



# Environmental Product Declaration

## LCA Results - Steel Welded Mesh (cont.)

(ND = module not declared; MNR = module not relevant; INA = indicator not assessed; AGG = aggregated)

### Core environmental impact indicators

Life Cycle Stage	Impact Category		EP-marine	EP-terrestrial	POCP	ADP-mineral & metals	ADP-fossil	WDP
			kg N eq	mol N eq	kg NMVOC eq	kg Sb eq	MJ, net calorific value	m <sup>3</sup> world eq deprived
Product stage	Raw material supply	A1	1.35	13.5	4.06	8.82E-05	1.72E+04	84.9
	Transport	A2	0.019	0.202	0.047	1.03E-06	2.06E+02	0.063
	Manufacturing	A3	0.108	1.18	0.290	1.98E-06	7.92E+02	0.553
	Total (of product stage)	A1-3	1.47	14.9	4.40	9.12E-05	1.82E+04	85.5
Construction process stage	Transport	A4	0.011	0.117	0.023	1.21E-06	233	0.0733
	Construction	A5	0.029	0.292	0.086	1.88E-06	3.68E+02	1.71
Use stage	Use	B1	0	0	0	0	0	0
	Maintenance	B2	0	0	0	0	0	0
	Repair	B3	0	0	0	0	0	0
	Replacement	B4	0	0	0	0	0	0
	Refurbishment	B5	0	0	0	0	0	0
	Operational energy use	B6	0	0	0	0	0	0
	Operational water use	B7	0	0	0	0	0	0
<b>%92 Recycling / %8 Landfill Scenario</b>								
End of life	Deconstruction, demolition	C1	0.004	0.045	0.011	2.94E-08	27.7	0.016
	Transport	C2	0.054	0.580	0.129	3.15E-06	626	0.191
	Waste processing	C3	0	0	0	0	0	0
	Disposal	C4	0.002	0.025	0.007	7.57E-08	16.0	0.132
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	-0.498	-5.36	-1.66	-2.28E-04	-6.82E+03	-9.4
<b>100% Landfill Scenario</b>								
End of life	Deconstruction, demolition	C1	0.004	0.045	0.011	2.94E-08	27.7	0.016
	Transport	C2	1.40E-03	0.015	0.003	1.50E-07	28.8	0.009
	Waste processing	C3	0	0	0	0	0	0
	Disposal	C4	0.028	0.308	0.085	9.46E-07	200	1.65
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	0.518	5.59	1.75	-2.10E-04	7.11E+03	3.57
<b>100% Recycling Scenario</b>								
End of life	Deconstruction, demolition	C1	0.004	0.045	0.011	2.94E-08	27.7	0.016
	Transport	C2	0.058	0.630	0.129	3.41E-06	678	0.207
	Waste processing	C3	0	0	0	0	0	0
	Disposal	C4	0	0	0.007	0	0	0
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	-0.586	-6.32	-1.66	-2.30E-04	-8.03E+03	-10.5

ADP-mineral&metals = Abiotic depletion potential for non-fossil resources;  
 ADP-fossil = Depletion potential of the stratospheric ozone layer;  
 WDP = Water (user) deprivation potential, deprivation-weighted water consumption.  
 The results of the three environmental impact indicators above shall be used with care as the uncertainties on these results are high or as there is limited experienced with these indicators.

EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment;  
 EP-terrestrial = Eutrophication potential, accumulated exceedance;  
 POCP = Formation potential of tropospheric ozone;  
 PM = Particulate matter.



# Environmental Product Declaration

## LCA Results - Steel Welded Mesh (cont.)

(ND = module not declared; MNR = module not relevant; INA = indicator not assessed; AGG = aggregated)

Parameters describing environmental impacts								
Life Cycle Stage	Impact Category		PM	IRP	ETP-fw	HTP-c	HTP-nc	SQP
			disease incidence	kBq U <sup>235</sup> eq	CTUe	CTUh	CTUh	dimensionless
Product stage	Raw material supply	A1	8.01E-05	12.4	3.41E+03	2.18E-06	7.76E-06	1.14E+03
	Transport	A2	9.41E-07	0.037	2.59E+02	3.50E-09	1.91E-07	85.0
	Manufacturing	A3	3.12E-06	0.041	1.78E+02	1.76E-08	1.17E-06	83.5
	Total (of product stage)	A1-3	8.42E-05	12.5	3.85E+03	2.20E-06	9.13E-06	1.31E+03
Construction process stage	Transport	A4	2.67E-07	0.043	303	4.07E-09	2.30E-07	104
	Construction	A5	1.67E-06	0.252	96.2	4.41E-08	1.96E-07	32.0
Use stage	Use	B1	0	0	0	0	0	0
	Maintenance	B2	0	0	0	0	0	0
	Repair	B3	0	0	0	0	0	0
	Replacement	B4	0	0	0	0	0	0
	Refurbishment	B5	0	0	0	0	0	0
	Operational energy use	B6	0	0	0	0	0	0
	Operational water use	B7	0	0	0	0	0	0
<b>%92 Recycling / %8 Landfill Scenario</b>								
End of life	Deconstruction, demolition	C1	7.82E-08	5.77E-04	32.9	5.92E-10	7.53E-09	0.036
	Transport	C2	1.45E-06	0.113	792	1.07E-08	5.87E-07	262
	Waste processing	C3	0	0	0	0	0	0
	Disposal	C4	1.08E-07	0.019	13.8	2.13E-10	7.98E-09	3.96
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	-3.11E-05	11.61	-1.10E+03	-1.53E-06	1.04E-06	5.31E+02
<b>100% Landfill Scenario</b>								
End of life	Deconstruction, demolition	C1	7.82E-08	5.77E-04	32.9	5.92E-10	7.53E-09	0.036
	Transport	C2	3.23E-08	0.005	37.4	5.03E-10	2.84E-08	12.8
	Waste processing	C3	0	0	0	0	0	0
	Disposal	C4	1.35E-06	0.235	173	2.67E-09	9.98E-08	49.5
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	3.11E-05	-12.6	1.07E+03	1.40E-06	-1.18E-06	-5.95E+02
<b>100% Recycling Scenario</b>								
End of life	Deconstruction, demolition	C1	7.82E-08	5.77E-04	32.9	5.92E-10	7.53E-09	0.036
	Transport	C2	1.57E-06	0.123	858	1.16E-08	6.36E-07	284
	Waste processing	C3	0	0	0	0	0	0
	Disposal	C4	0	0	0	0	0	0
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	-3.65E-05	13.7	-1.29E+03	-1.78E-06	1.23E-06	6.29E+02

IRP = Potential human exposure efficiency relative to U235; This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator.

HTP-nc = Potential comparative toxic unit for humans; and ETP-fw = Potential comparative toxic unit for ecosystems; HTP-c = Potential comparative toxic unit for humans; SQP = Potential soil quality index.

The results of the four environmental impact indicators above shall be used with care as the uncertainties on these results are high or as there is limited experience with these indicators.



# Environmental Product Declaration

## LCA Results - Steel Welded Mesh (cont.)

(ND = module not declared; MNR = module not relevant; INA = indicator not assessed; AGG = aggregated)

### Parameters describing resource use

Life Cycle Stage	Impact Category		PERE	PERM	PERT	PENRE	PENRM	PENRT
			MJ	MJ	MJ	MJ	MJ	MJ
Product stage	Raw material supply	A1	2.25E+03	0	2.25E+03	1.98E+04	0	1.98E+04
	Transport	A2	14.2	0	14.2	2.06E+02	0	2.06E+02
	Manufacturing	A3	1.06E+02	0	1.06E+02	7.92E+02	0	7.92E+02
	Total (of product stage)	A1-3	2.37E+03	0	2.37E+03	2.08E+04	0	2.08E+04
Construction process stage	Transport	A4	17.2	0	17.2	2.33E+02	0	2.33E+02
	Construction	A5	46.9	0	42.6	4.21E+02	0	3.98E+02
Use stage	Use	B1	0	0	0	0	0	0
	Maintenance	B2	0	0	0	0	0	0
	Repair	B3	0	0	0	0	0	0
	Replacement	B4	0	0	0	0	0	0
	Refurbishment	B5	0	0	0	0	0	0
	Operational energy use	B6	0	0	0	0	0	0
	Operational water use	B7	0	0	0	0	0	0
<b>%92 Recycling / %8 Landfill Scenario</b>								
End of life	Deconstruction, demolition	C1	0.056	0	0.056	27.7	0	27.7
	Transport	C2	43.6	0	43.6	626	0	626
	Waste processing	C3	0	0	0	0	0	0
	Disposal	C4	3.09	0	3.09	16	0	16
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	1.04E+03	0	1.04E+03	-6.82E+03	0	-6.82E+03
<b>100% Landfill Scenario</b>								
End of life	Deconstruction, demolition	C1	0.056	0	0.056	27.7	0	27.7
	Transport	C2	2.12	0	2.12	28.8	0	28.8
	Waste processing	C3	0	0	0	0	0	0
	Disposal	C4	38.7	0	38.7	200	0	200
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	-1.15E+03	0	-1.15E+03	7.11E+03	0	7.11E+03
<b>100% Recycling Scenario</b>								
End of life	Deconstruction, demolition	C1	0.056	0	0.056	27.7	0	27.7
	Transport	C2	47.2	0	47.2	678	0	678
	Waste processing	C3	0	0	0	0	0	0
	Disposal	C4	0	0	0	0	0	0
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	1.23E+03	0	1.23E+03	-8.03E+03	0	-8.03E+03

PERE = Use of renewable primary energy excluding renewable primary energy used as raw materials;  
 PERM = Use of renewable primary energy resources used as raw materials;  
 PERT = Total use of renewable primary energy resources;

PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials;  
 PENRM = Use of non-renewable primary energy resources used as raw materials;  
 PENRT = Total use of non-renewable primary energy resource



# Environmental Product Declaration

## LCA Results - Steel Welded Mesh (cont.)

(ND = module not declared; MNR = module not relevant; INA = indicator not assessed; AGG = aggregated)

Parameters describing resource use						
Life Cycle Stage	Impact Category		SM	RSF	NRSF	FW
			kg	MJ net calorific value	MJ net calorific value	m <sup>3</sup>
Product stage	Raw material supply	A1	585	0	0	3.29
	Transport	A2	0	0	0	0.007
	Manufacturing	A3	0	0	0	0.180
	Total (of product stage)	A1-3	585	0	0	3.48
Construction process stage	Transport	A4	0	0	0	0.008
	Construction	A5	11.7	0	0	0.067
Use stage	Use	B1	0	0	0	0
	Maintenance	B2	0	0	0	0
	Repair	B3	0	0	0	0
	Replacement	B4	0	0	0	0
	Refurbishment	B5	0	0	0	0
	Operational energy use	B6	0	0	0	0
	Operational water use	B7	0	0	0	0
<b>%92 Recycling / %8 Landfill Scenario</b>						
End of life	Deconstruction, demolition	C1	0	0	0	4.04E-04
	Transport	C2	0	0	0	0.021
	Waste processing	C3	0	0	0	0
	Disposal	C4	0	0	0	0.004
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	944	0	0	-0.643
<b>100% Landfill Scenario</b>						
End of life	Deconstruction, demolition	C1	0	0	0	4.04E-04
	Transport	C2	0	0	0	1.02E-03
	Waste processing	C3	0	0	0	0
	Disposal	C4	0	0	0	0.048
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	0	0	0	0.425
<b>100% Recycling Scenario</b>						
End of life	Deconstruction, demolition	C1	0	0	0	4.04E-04
	Transport	C2	0	0	0	0.023
	Waste processing	C3	0	0	0	0
	Disposal	C4	0	0	0	0
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	1.03E+03	0	0	-0.736

SM = Use of secondary material;  
RSF = Use of renewable secondary fuels;

NRSF = Use of non-renewable secondary fuels;  
FW = Net use of fresh water



# Environmental Product Declaration

## LCA Results - Steel Welded Mesh (cont.)

(ND = module not declared; MNR = module not relevant; INA = indicator not assessed; AGG = aggregated)

### Other environmental information describing waste categories

Life Cycle Stage	Impact Category		HWD	NHWD	RWD
			kg	kg	kg
Product stage	Raw material supply	A1	2.17E-06	47.7	0.110
	Transport	A2	7.45E-09	0.026	2.69E-04
	Manufacturing	A3	1.51E-08	0.729	3.08E-04
	Total (of product stage)	A1-3	2.19E-06	48.5	0.111
Construction process stage	Transport	A4	8.45E-09	0.031	3.07E-04
	Construction	A5	4.42E-08	2.56	0.002
Use stage	Use	B1	0	0	0
	Maintenance	B2	0	0	0
	Repair	B3	0	0	0
	Replacement	B4	0	0	0
	Refurbishment	B5	0	0	0
	Operational energy use	B6	0	0	0
	Operational water use	B7	0	0	0
<b>%92 Recycling / %8 Landfill Scenario</b>					
End of life	Deconstruction, demolition	C1	4.71E-10	0.004	7.85E-06
	Transport	C2	2.26E-08	0.081	8.18E-04
	Waste processing	C3	0	0	0
	Disposal	C4	3.51E-09	80.1	1.70E-04
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	-8.50E-04	-13.6	0.111
<b>100% Landfill Scenario</b>					
End of life	Deconstruction, demolition	C1	4.71E-10	0.004	7.85E-06
	Transport	C2	1.04E-09	0.004	3.80E-05
	Waste processing	C3	0	0	0
	Disposal	C4	4.38E-08	1.00E+03	0.002
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	-8.54E-04	14.7	-0.120
<b>100% Recycling Scenario</b>					
End of life	Deconstruction, demolition	C1	4.71E-10	0.004	7.85E-06
	Transport	C2	2.45E-08	0.087	8.86E-04
	Waste processing	C3	0	0	0
	Disposal	C4	0	0	0
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	-8.50E-04	-16.1	0.132

HWD = Hazardous waste disposed;  
 NHWD = Non-hazardous waste disposed;  
 RWD = Radioactive waste disposed



# Environmental Product Declaration

## LCA Results - Steel Welded Mesh (cont.)

(ND = module not declared; MNR = module not relevant; INA = indicator not assessed; AGG = aggregated)

Other environmental information describing output flows – at end of life						
Life Cycle Stage	Impact Category		CRU	MFR	MER	EE
			kg	kg	kg	MJ per energy carrier
Product stage	Raw material supply	A1	0	0	0	0
	Transport	A2	0	0	0	0
	Manufacturing	A3	0	5.15	0	0
	Total (of product stage)	A1-3	0	5.15	0	0
Construction process stage	Transport	A4	0	0	0	0
	Construction	A5	0	18.4	0	0
Use stage	Use	B1	0	0	0	0
	Maintenance	B2	0	0	0	0
	Repair	B3	0	0	0	0
	Replacement	B4	0	0	0	0
	Refurbishment	B5	0	0	0	0
	Operational energy use	B6	0	0	0	0
	Operational water use	B7	0	0	0	0
<b>%92 Recycling / %8 Landfill Scenario</b>						
End of life	Deconstruction, demolition	C1	0	920	0	0
	Transport	C2	0	0	0	0
	Waste processing	C3	0	0	0	0
	Disposal	C4	0	0	0	0
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	0	0	0	0
<b>100% Landfill Scenario</b>						
End of life	Deconstruction, demolition	C1	0	0	0	0
	Transport	C2	0	0	0	0
	Waste processing	C3	0	0	0	0
	Disposal	C4	0	0	0	0
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	0	0	0	0
<b>100% Recycling Scenario</b>						
End of life	Deconstruction, demolition	C1	0	1.00E+03	0	0
	Transport	C2	0	0	0	0
	Waste processing	C3	0	0	0	0
	Disposal	C4	0	0	0	0
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	0	0	0	0

CRU = Components for reuse;  
MFR = Materials for recycling

MER = Materials for energy recovery;  
EE = Exported Energy



## Scenarios and additional technical information

Scenarios and additional technical information			
Scenario	Parameter	Units	Results
Module A4 Transport to the Building Site	<p><b>Hard Drawn Steel Wire:</b> On leaving the manufacturing factory, reinforcing steel products are transported by road to a fabricator where they are converted into constructional steel forms suitable for the installation site, then transported on to the construction site. Road transport distance for hard drawn steel wire to fabricators and for steel construction forms to site are assumed to be 100 km and 250 km, respectively; only one-way distances are considered on the assumption that logistics optimise backhauls beyond A3.</p> <p><b>Steel Welded Mesh:</b> On leaving the manufacturing factory, reinforcing steel products are transported to the construction site, including provision of all materials and products. Road transport distance to site is assumed to be 250 km; only one-way distances are considered on the assumption that logistics optimise backhauls beyond A3</p>		
	Truck trailer - Fuel	litre/km	1.56
	Distance (Hard Drawn Wire)	km	350
	Distance (Mesh)	km	250
	Capacity utilisation (including empty returns)	%	61
	Bulk density of transported products	kg/m <sup>3</sup>	7850
Module A5 Installation in the Building	<p><b>Hard Drawn Steel Wire:</b> Fabrication is treated as a simple unit process converting steel products into constructional steel forms (primarily cutting, bending and, where applicable, welding). Inputs include electricity (residual grid mix of Malaysia), fuels and cutting gases. Outputs include fabrication scrap. Modelling assumptions applied: 15.34 kWh per tonne of finished product (fabrication energy) and 2% fabrication wastage. Electricity is modelled using the residual grid mix of Malaysia.</p> <p><b>Steel Welded Mesh:</b> Mesh is delivered as a finished product; manufacturing steps (wire drawing and resistance welding) are covered in A3 and are not repeated in A5. Electricity is modelled using the residual grid mix of Malaysia.</p> <p>Installation in the building; including provision of all materials, products, and energy, as well as waste processing up to the end-of-waste state or disposal of final residues during the construction stage. Installation of the product into the building is assumed to result in 10% wastage (determined based on typical installation losses reported by the WRAP Net Waste Tool [WRAP 2017]). Electricity is modelled using the residual grid mix of Malaysia.</p>		
	Ancillary materials for installation - Waste material from fabrication, losses per tonne of construction steel forms	%	2
	Energy Use - Energy per tonne required to fabricate construction steel forms	kWh	15.34
	Waste materials from installation wastage	%	10
	No maintenance required.		
Module B2 Maintenance	No maintenance required.		
Module B3 Repair	No repair process required.		
Module B4 Replacement	No replacement considerations required.		
Module B5 Refurbishment	No refurbishment process required.		
Reference Service Life	High-tensile prestressed steel strand products for the prestressing of concrete are used in the main building structure so the reference service life will equal the lifetime of the building. BS EN 1990 specifies "building structures and other common structures" as having a lifetime of 50 years. On this basis, the RSL for this EPD is assumed to be 50 years.		
Module B6 Use of Energy	No energy required during use stage related to the operation of the building.		
Module B7 Use of Water	No water required during use stage related to the operation of the building.		
Modules C1 to C4 End of life	<p>The end-of-life stage starts when the construction product is replaced, dismantled or deconstructed from the building or construction works and does not provide any further function. The recovered steel is transported for recycling while a small portion is assumed to be unrecoverable and remains in the rubble which is sent to landfill. 92% of the high-tensile prestressed steel strand is assumed to be recycled and 8% is sent to landfill [STEELCONSTRUCTION.INFO 2012]. The EPD covers transport to, and end-of-life in China.</p> <p>Once steel scrap is generated through the deconstruction activities on the demolition site it is considered to have reached the "end of waste" state. No further processing is required so there are no impacts associated with this module. Hence no impacts are reported in module C3.</p>		
	Waste for recycling - Recovered steel from crushed concrete	%	92
	Waste for energy recovery - Energy recovery is not considered for this study as most end-of-life steel scrap is recycled, while the remainder is landfilled	-	-



# Environmental Product Declaration

## Scenarios and additional technical information

Scenario	Parameter	Units	Results
	Waste for final disposal - Unrecoverable steel lost in crushed concrete and sent to landfill	%	8
	Portion of energy assigned to rebar from energy required to demolish building, per tonne	MJ	24
	Transport to waste processing by Truck - Fuel consumption	litre/km	1.56
	Transport to waste processing by Truck – Distance	km	463
	Transport to waste processing by Truck – Capacity utilisation	%	61
	Transport to waste processing by Truck – Density of Product	kg/m <sup>3</sup>	7810
	Transport to waste processing by Container ship - Fuel consumption	litre/km	0.0041
	Transport to waste processing by Container ship - Distance	km	158
	Transport to waste processing by Container ship – Capacity utilisation	%	53
	Transport to waste processing by Container ship – Density of Product	kg/m <sup>3</sup>	7810
Module D	<p>It is assumed that 92% of the steel used in the structure is recovered for recycling, while the remainder is landfilled. "Benefits and loads beyond the system boundary" (module D) accounts for the environmental benefits and loads resulting from net steel scrap that is used as raw material in the steel plant and that is collected for recycling at end of life. The balance between total scrap arisings recycled from fabrication, installation and end of life and scrap consumed by the manufacturing process (internally sourced scrap is not included in this calculation). These benefits and loads are calculated by including the burdens of recycling and the benefit of avoided primary production.</p> <p>This study is concerned with wire rods manufacturers from both secondary production route (steel scrap) and primary production route (with BF/BOF). In secondary production route using steel scrap only, more scrap is required as input to the system than is recovered at end of life. In primary production route, a large amount of net scrap is generated over the life cycle as the iron ore used to obtain feedstock steel is a virgin source and there is a high end of life recycling rate for reinforcing steel products. As feedstock steel from both secondary production route (steel scrap) and primary production route were used in the production of hard drawn wire and mesh, the net effect of the weighted average of the used quantities is that module D mainly models the burdens associated with the scrap input (secondary material) to the steelmaking process.</p> <p>The resulting scrap credit/burden is calculated based on the global "value of scrap" approach (/worldsteel 2011).</p>		
	Recycled Content (Hard drawn steel wire)	kg	476
	Recycled Content (Steel welded mesh)	kg	376
	Re-used Content	kg	0
	Recovered for recycling	kg	920
	Recovered for re-use	kg	0
	Recovered for energy	kg	0



## Summary, comments and additional information

### Interpretation

Iron ore and scrap based hard drawn steel wire and welded mesh products for the prestressing of concrete of Southern Steel Mesh Sdn Bhd is made via the secondary and primary production routes. The bulk of the environmental impacts and primary energy demand are attributed to the manufacturing phase, covered by information modules A1-A3 of EN 15804:2012+A2:2019/AC2021.

The interpretation of the results has been carried out considering the methodology- and data-related assumptions and limitations declared in the EPD. This interpretation section focuses on the environmental impact categories as well as the primary energy demand indicators only.

#### Global Warming Potential (GWP)

The majority of the life cycle GWP impact occurs in the production phase (A1-A3). A1-A3 impacts for hard drawn steel wire and steel welded mesh products account for 93.88% and 94.72% overall life cycle impacts for this category respectively. The most significant contributions to production phase impacts are the upstream production of raw materials used in the steelmaking process, generation/supply of electricity and the production/use of fuels on site. Fabrication, installation and the end-of-life processes covered in C1-C4 make a minimal contribution to GWP. For overall climate change impacts, carbon dioxide emissions account for the majority of impacts with methane being the second most significant contributor.

#### Ozone Depletion Potential (ODP)

The majority of impacts are associated with the production phase (A1-3). Significant contributions to production phase impact come from the emission of ozone depleting substances during the upstream production of raw materials/pre-products as well as those arising from electricity production. Module D shows a very small credit even though scrap burdens are being assessed in this phase. This is explained because ODP emissions are linked to grid electricity production used.

#### Acidification Potential (AP)

Acidification potential is generally driven by the production of sulphur dioxide and nitrogen oxides through the combustion of fossil fuels, particularly coal and crude oil products. The majority of the lifecycle AP impact occurs in the production phase (A1-A3), similar to GWP. The major contributors to production phase AP impacts comes from energy resources used in the production of the raw materials and pre-products for the steelmaking process and from transportation. Fabrication, installation and the end-of-life processes classed under C1-C4 make minimal contributions.

#### Eutrophication Potential (EP)

Eutrophication is driven by nitrogen and phosphorus containing emissions and as with GWP and AP is often strongly linked with the use of fossil fuels. The major eutrophication impacts occur in the production phase (A1-A3). Significant contributions to production phase impact comes from the production of raw materials and transport. Fabrication, installation and the end-of-life processes classed under C1-C4 again make minimal contributions.

#### Photochemical Ozone Creation Potential (POCP)

POCP tends to be driven by emissions of carbon monoxide, nitrogen oxides (NO<sub>x</sub>), sulphur dioxide and NMVOCs. The production phase is the dominant phase of the lifecycle with regards to POCP impacts. Again, these are all emissions commonly associated with the combustion of fuels. Significant contributors to POCP are the upstream production of raw materials/pre-products and transport, directly linked to fossil fuel combustion. It should be noted that the impacts for steel recycling in module D is almost of the same magnitude as the production phase impacts.



# Environmental Product Declaration

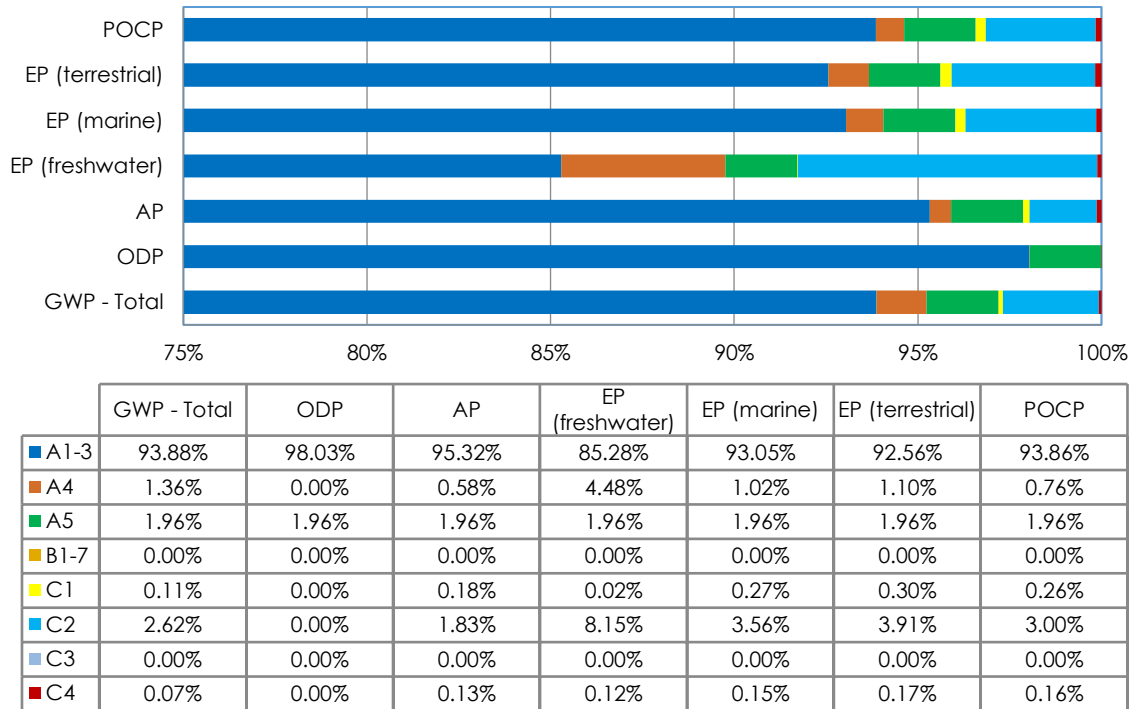


Figure 1 - shows the relative contribution of each life cycle stage to different environmental indicators for the hard drawn steel wire products manufactured by the secondary (scrap based) and primary production route (iron ore)

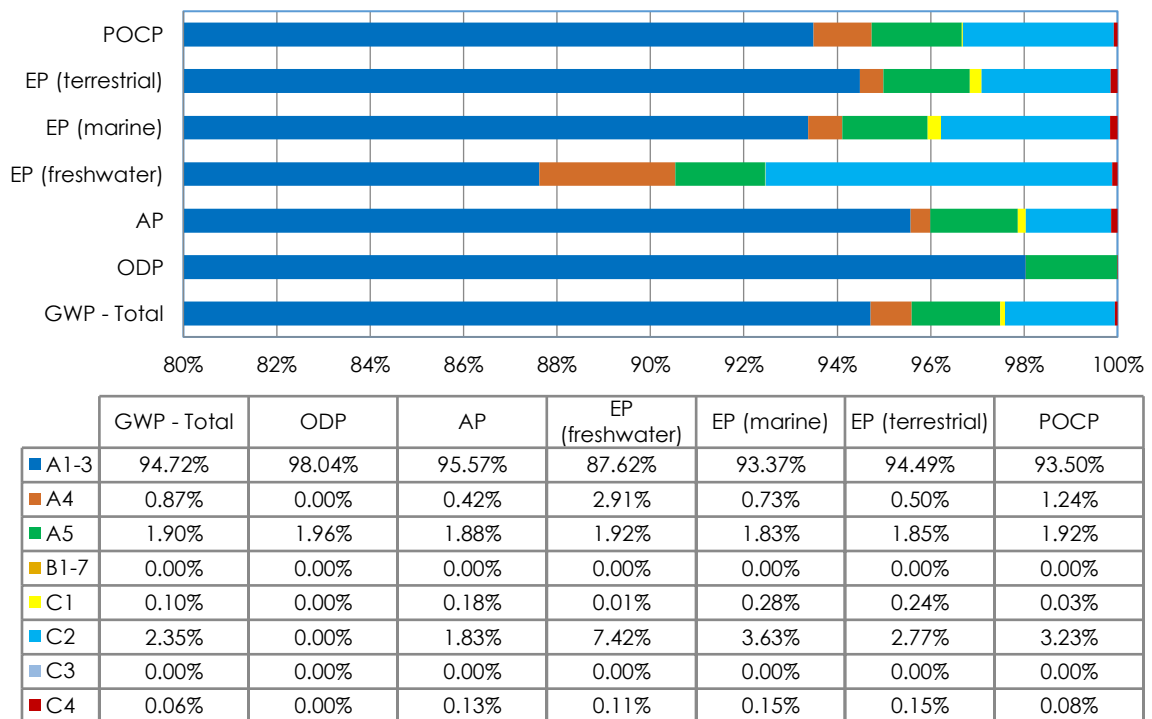


Figure 2 - shows the relative contribution of each life cycle stage to different environmental indicators for the steel welded mesh products manufactured by the secondary (scrap based) and primary production route (iron ore)



## References

BSI. Sustainability of construction works – Environmental product declarations – Core rules for the product category of construction products. EN 15804:2012+A2:2019/AC2021. London, BSI, 2019.

BSI. Environmental labels and declarations. Self-declared environmental claims (Type II environmental labelling). BS EN ISO 14021:2016+A1:2021. London, BSI, 2022

BSI. Environmental labels and declarations – Type III Environmental declarations – Principles and procedures. BS EN ISO 14025:2010 (exactly identical to ISO 14025:2006). London, BSI, 2010.

BSI. Environmental management – Life cycle assessment – Principles and framework. BS EN ISO BS EN ISO 14040:2006+A1:2020. London, BSI, 2020.

BSI. Environmental management – Life cycle assessment – requirements and guidelines. BS EN ISO 14044:2006+A2:2020. London, BSI, 2020.

BSI. Sustainability of construction works. Data quality for environmental assessment of products and construction work. Selection and use of data. BS EN 15941:2024. London, 2024.

BSI. Sustainability of construction works. Environmental product declarations. Communication format business-to-business. BS EN 15942:2021. London, 2021.

BSI. Eurocode. Basis of structural and geotechnical design. BS EN 1990:2023. London, 2023.

Demolition Energy Analysis of Office Building Structural Systems, Athena Sustainable Materials Institute, 1997

The Concrete Society, [Design working life \(concrete.org.uk\)](https://www.concrete.org.uk)

EN 16449:2014. Wood and wood-based products — Calculation of the biogenic carbon content of wood and conversion to carbon dioxide. CEN, 2014.

IPCC. 2006 IPCC Guidelines for National Greenhouse Gas Inventories – Volume 4 (AFOLU). 2006

European Commission JRC. Updated characterisation and normalisation factors for the Environmental Footprint 3.1 method (EUR 31414 EN). Publications Office of the European Union, 2023.

CARES: Product Category Rules (PCR) for Type III Environmental Product Declaration (EPD) of Semi-Finished and Finished Steel Products, Issue/Revision Date: February 2025

LCA for Experts (LCA FE) Software System and Managed Life cycle Content (MLC) Database for Life Cycle Engineering, Sphera Solutions GmbH, Leinfelden-Echterdingen, <https://lcadatabase.sphera.com/>, 2025

International Energy Agency (IEA) – Electricity grids and secure energy transitions: Enhancing the foundations of resilient, sustainable and affordable power systems, 2023), <https://iea.blob.core.windows.net/assets/ea2ff609-8180-4312-8de9-494bcf21696d/ElectricityGridsandSecureEnergyTransitions.pdf>

Kreißig, J. und J. Kümmel (1999): Baustoff-Ökobilanzen. Wirkungsabschätzung und Auswertung in der Steine-Erden-Industrie. Hrsg. Bundesverband Baustoffe Steine + Erden e.V.

U.S. Geological Survey, Mineral Commodity Summaries, Iron and Steel Slag, January 2014

SteelConstruction.info; The recycling and reuse survey, 2012  
[http://www.steelconstruction.info/The\\_recycling\\_and\\_reuse\\_survey](http://www.steelconstruction.info/The_recycling_and_reuse_survey)

Sustainability of construction works - Environmental product declarations - Methodology for selection and use of generic data; German version CEN/TR 15941



# Environmental Product Declaration

REGULATION (EU) No 305/2011 OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL of 9 March 2011 laying down harmonised conditions for the marketing of construction products and repealing Council Directive 89/106/EEC

WRAP Net Waste Tool, Waste & Resources Action Programme (WRAP), 2013 [No longer available; formerly at [www.wrap.org.uk/nwtool](http://www.wrap.org.uk/nwtool)]

worldsteel Association - Life cycle inventory methodology report for steel products, 2017

MS 144:2014 Steel wire for the reinforcement of concrete products - Specification (Fourth revision)

MS 145:2014 Steel fabric for the reinforcement of concrete -Specification (Fourth revision)

MS 146:2014 Steel for the reinforcement of concrete - Weldable reinforcing steel- Bar, coil and decoiled product - Specification (Fourth revision)

AS/NZS 4671:2019 Steel for the reinforcement of concrete

BS 4449:2005+A3:2016 Steel for the reinforcement of concrete. Weldable reinforcing steel. Bar, coil and decoiled product. Specification.

BS 4483:2025 Steel fabric for the reinforcement of concrete. Specification