



# Environmental Product Declaration

## Statement of Verification

CARES EPD No.: 0002

Issue 01

This is to verify that the  
**Environmental Product Declaration**

Provided by:  
PT Dexin Steel Indonesia


Is in accordance with the requirements of:  
EN 15804:2012 + A2:2019 and ISO 14025:2010  
and BRE Global PCR for Type III EPD of Construction Products  
to EN 15804+A2. PN514 3.1

This declaration is for:  
Carbon Steel Billet (Primary production route – Iron Ore)



## Company address:

JL Trans Sulawesi Desa Fatufia  
Kec.  
Bahadopi Morowall,  
Sulawesi Tengah,  
Indonesia

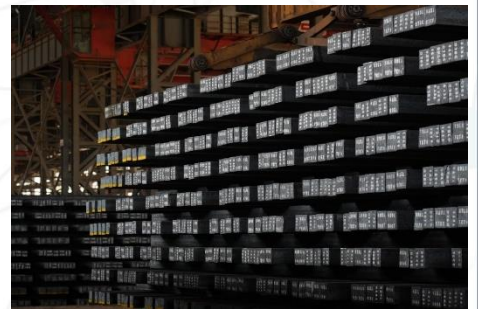

*LadinCamci*

Ladin Camci

15 November 2024

Signed for CARES

Operator

Date of this Issue

15 November 2024

14 November 2027

First Issue Date

Expiry Date

The validity of this Environmental Product Declaration can be verified by contacting CARES on +44 (0)1732 450 000 or visiting CARES website <https://www.carescertification.com/certification-schemes/environmental-product-declarations>.

CARES, Pembroke House, 21 Pembroke Road, Sevenoaks, Kent TN13 1XR



# Environmental Product Declaration

## Environmental Product Declaration

EPD Number: CARES EPD 0002

### General Information

|  |  |
|--|--|
| <b>EPD Programme Operator</b>            | CARES<br>Pembroke House, 21 Pembroke Road, Sevenoaks, Kent, TN13 1XR UK<br><a href="http://www.carescertification.com">www.carescertification.com</a>  |
| <b>Applicable Product Category Rules</b> | BRE Global Product Category Rules (PCR) for Type III EPD of Construction Products to EN 15804+A2. PN514 3.1  |
| <b>Commissioner of LCA study</b>         | CARES<br>Pembroke House, 21 Pembroke Road, Sevenoaks, Kent, TN13 1XR UK<br><a href="http://www.carescertification.com">www.carescertification.com</a>  |
| <b>LCA consultant/Tool</b>               | CARES EPD Tool v2.8<br>SPHERA SOLUTIONS UK LIMITED<br>The Innovation Centre Warwick Technology Park,<br>Gallows Hill, Warwick, Warwickshire<br>CV34 6UW UK<br><a href="http://www.sphera.com">www.sphera.com</a> |
| <b>Declared/Functional Unit</b>          | Declared Unit<br>1 tonne of carbon steel billet manufactured by the blast furnace/basic oxygen furnace (BF/BOF) production route   |
| <b>Applicability/Coverage</b>            | Manufacturer-specific product produced at a single plant of one manufacturer   |
| <b>EPD Type</b>                          | Cradle to Gate with Modules C1-C4 and Module D   |
| <b>Background database</b>               | LCA FE (GaBi) Dataset Documentation (Sphera 2023.1)  |

### Demonstration of Verification

CEN standard EN 15804 serves as the core PCR <sup>a</sup>

Independent verification of the declaration and data according to EN ISO 14025:2010

Internal

External

(Where appropriate <sup>b</sup>) Third party verifier:

Dr Jane Anderson

a: Product category rules

b: Optional for business-to-business communication; mandatory for business-to-consumer communication (see EN ISO 14025:2010, 9.4)



# Environmental Product Declaration

## Comparability

Environmental product declarations from different programmes may not be comparable if not compliant with EN 15804:2012+A2:2019. Comparability is further dependent on the specific product category rules, system boundaries and allocations, and background data sources. See Clause 5.3 of EN 15804:2012+A2:2019 for further guidance

## Information modules covered

| Product Stage        |           |               | Construction Stage |                             | Use Stage |             |        |             |               |                        |                       | End-of-life Stage         |           |                  |          | Benefits and loads beyond the system boundary |
|----------------------|-----------|---------------|--------------------|-----------------------------|-----------|-------------|--------|-------------|---------------|------------------------|-----------------------|---------------------------|-----------|------------------|----------|---|
| A1                   | A2        | A3            | A4                 | A5                          | B1        | B2          | B3     | B4          | B5            | B6                     | B7                    | C1                        | C2        | C3               | C4       | D   |
| Raw materials supply | Transport | Manufacturing | Transport to site  | Construction – Installation | Use       | Maintenance | Repair | Replacement | Refurbishment | Operational energy use | Operational water use | Deconstruction demolition | Transport | Waste processing | Disposal | Reuse, Recovery and/or Recycling potential    |
| ✓                    | ✓         | ✓             | ND                 | ND                          | ND        | ND          | ND     | ND          | ND            | ND                     | ND                    | ✓                         | ✓         | ✓                | ✓        | ✓   |

Note: Checks indicate the Information Modules Declared, ND indicates Not Declared.

## Manufacturing site

PT Dexin Steel Indonesia  
JL Trans Sulawesi Desa Fatufia Kec.  
Bahadopi Morowall,  
Sulawesi Tengah,  
Indonesia

## Construction Product:

### Product Description

Carbon Steel Billet is non-alloy or low-alloy steel semi-product. Steel Billets (according to product standards listed in Summary, Comments and Additional Information) that are manufactured via the blast furnace/basic oxygen furnace route (BF/BOF), followed by continuous casting.

Carbon steel billet is produced for hot rolling to obtain reinforcing steel bars for direct use, or to obtain wire rod to produce other reinforcing steels by further processing, or to obtain other forms of structural steels.

The declared unit is 1 tonne of carbon steel billets manufactured from the blast furnace/basic oxygen furnace (BF/BOF) production route.



# Environmental Product Declaration

## Technical Information

| Property  | Value, Unit            |
|---|------------------------|
| Production route                                  | BF-BOF                 |
| Density   | 7850 kg/m <sup>3</sup> |
| Recycled content (as per ISO 14021:2016/Amd:2021) | 2.0 %                  |

Technical Information details are as per relevant product standards listed in References section

## Main Product Contents

| Material/Chemical Input                 | %  |
|---|----|
| Fe                                      | 97 |
| C, Mn, Si, V, Ni, Cu, Cr, Mo and others | 3  |

## Manufacturing Process


Integrated steelworks are complicated operations comprising multiple production processes as described below.

- Boilers/CHP: generates the steam used on site and some of the electricity (the remainder is sourced from the Indonesia national grid). This process also supplies the blast air used in the blast furnace.
- Air separation unit: generates the gases and compressed air used in the production process (e.g. nitrogen, oxygen, hydrogen, argon, etc.).
- Lime plant: converts limestone and dolomite into lime/dolomite for use in the basic oxygen furnace and sinter plant.
- Coke ovens: converts coking coal into coke that is used as a reducing agent in the blast furnace and as a fuel in the sinter plant. Various co-products are generated from this process including coke oven gas (used as a fuel elsewhere on site), benzene, ammonium sulphate, sulphuric acid and tar.
- Sinter plant: agglomerates iron ore fines with other materials (e.g. lime and limestone) to form nodules of iron rich material that are suitable for charging into the blast furnace.
- Blast furnace: ferrous rich materials (sinter, iron ore, pellets and steel scrap), slag-forming materials (such as limestone), reducing agents (such as coke) and fuels (such as blast furnace gas and natural gas) with process gases and blast air generates molten iron ("hot metal") and slag and blast furnace gas (which is used as fuel in various site operations). The hot metal also undergoes desulphurisation to remove this unwanted element from the product.
- Steelmaking: covers the basic oxygen furnace (BOF) and secondary steelmaking steps in which the carbon content of the hot metal is reduced, and alloying materials are added to give the desired physical properties to the finished steel, which are formed into billets. BOF gas is also generated and is used as a fuel in various site operations). Slags are also generated from these processes, some of which are recycled in the sinter plant.



## Process flow diagram

### Integrated Iron & Steelmaking Production Route for Billet

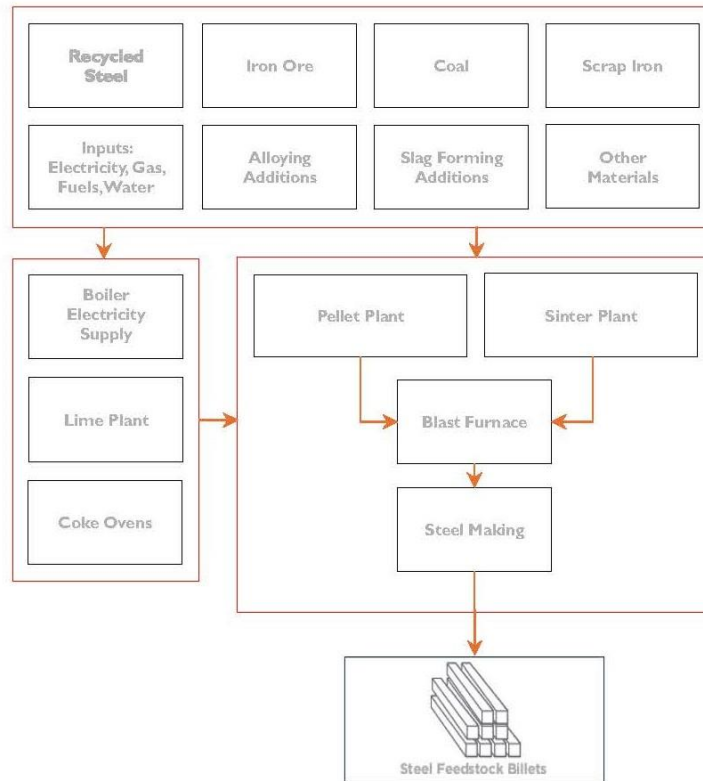

## Construction Installation

Processing and proper use of reinforcing steel and structural steel products manufactured from carbon steel billets depends on the application and should be made in accordance with generally accepted practices, standards and manufacturing recommendations.

During transport and storage of reinforcing steel and structural steel products the usual requirement for securing loads is to be observed.

## Use Information

The composition of the reinforcing steel and structural steel products manufactured from carbon steel billets does not change during use.

Carbon steel reinforcing steel and structural steel products do not cause adverse health effects under normal conditions of use.

No risks to the environment and living organisms are known to result from the mechanical destruction of the reinforcing steel product itself.

## End of Life

Reinforcing steel and other structural steel products manufactured from carbon steel billets are not reused at end of life but can be recycled to the same (or higher/lower) quality of steel depending upon the metallurgy and processing of the recycling route.

It is a high value resource, so efforts are made to recycle steel scrap rather than disposing of it at EoL. A recycling rate of 95% is typical for reinforcing steel products



## Life Cycle Assessment Calculation Rules

### Declared unit description

The declared unit is 1 tonne of carbon steel billet manufactured by the blast furnace/basic oxygen furnace (BF/BOF) production route


### System boundary

The system boundary of the EPD follows the modular design defined by EN 15804+A2. Type of this EPD is cradle to gate – with modules A1 to A3, modules C1-C4 and module D.

Impacts and aspects related to losses/wastage (i.e. production, transport and waste processing and end-of-life stage of lost waste products and materials) are considered in the modules in which the losses/wastage occur.

Once steel scrap has been collected for recycling it is considered to have reached the end of waste state.

Overview of Product System for Carbon Steel Billet

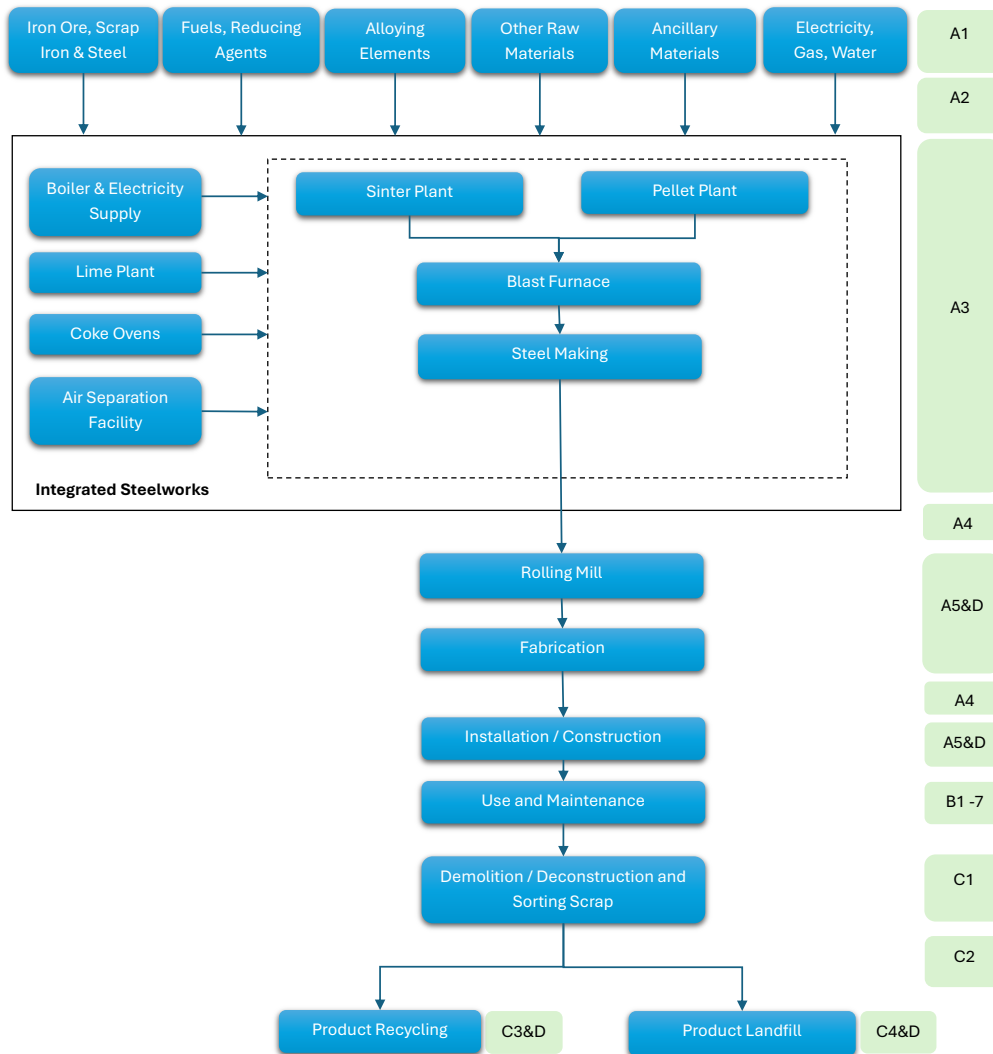



## Data sources and quality

The selection of data and the data quality requirements have been provided according to the requirements of BS EN 15941:2024.

Manufacturing data of the period 01/01/2023 – 31/12/2023 has been provided by PT Dexin Steel Indonesia operating on the geographical area noted in Manufacturing Site. A brief description of technology and inputs for the product is given in Manufacturing Process and in simplified Process Flow Diagram.

The primary data collection was thorough, considering all relevant flows and these data were verified during the audit conducted by CARES in June 2024, including also the verification of mass balance, to ensure that data for all the inputs and outputs for the process over the period of data collection have been collected, and that the unit process data will comply with the cut-off rules of EN 15804. The EPD covers end-of-life in United Kingdom.

Background data are consistently sourced from the LCA FE (GaBi) Dataset Documentation (Sphera 2023.1).

The selection of the background data for electricity generation is in line with the BRE Global PCR PN514 3.1 for Type III EPD of Construction Products to EN 15804+A2. Country or region-specific power grid mixes are selected from LCA FE (GaBi) Dataset Documentation (Sphera 2023.1). Thus, consumption grid mix of Indonesia has been selected to suit specific manufacturing location. The emission factor of carbon footprint of the applied consumption grid mix of Indonesia is 0,976 kg CO<sub>2</sub> eq/kWh.

There wasn't any data from different LCI/LCA databases used considering that the overall consistency of the study has not been adversely affected.

Schemes applied for data quality assessment was as per EN 15804:2012+A2:2019, Annex E, Table E.1 — Data quality level and criteria of the UN Environment Global Guidance on LCA database development.

|                                 |             |
|---------------------------------|-------------|
| Geographical Representativeness | : Good      |
| Technical Representativeness    | : Very Good |
| Time Representativeness         | : Very Good |

## Allocation

Steel production (modules A1-A3) is a complex process and generates many co-products including:

- Slags and sludges from the blast furnace, basic oxygen furnace and secondary steelmaking processes
- Energy rich gases from the coke ovens, blast furnace, basic oxygen furnace, secondary steelmaking processes
- Dusts and sludges from the blast furnace, basic oxygen furnace and secondary steelmaking, sintering, pelletising and lime production processes
- Coke breeze from the coke ovens
- Scrap iron and steel from the blast furnace, basic oxygen furnace, secondary steelmaking and rolling mill processes
- Mill scale from the basic oxygen furnace, secondary steelmaking and rolling mill processes

Most of these co-products are recycled within the steel mill itself and these internal loops have been included in the LCA model. The balance of inputs and outputs is not always closed and where excess material is generated no credits are modelled in module D for material leaving the system following EN 15804+A2 (section 6.3.4.2). Similarly, where recycling occurs outside the steelworks, transport to the recycler is included, but no credits are awarded for secondary material leaving the system boundary. Instead, all benefits and loads are cut off after the transport step. This cut-off approach is more conservative than EN 15804 section 6.3.5.2, which states that "Flows leaving the system at the end-of-waste boundary of the product stage (A1-A3) shall be allocated as co-products (see 6.4.3.2)."

The value of the steel product far exceeds the value of the cut off secondary material streams, meaning that co-product allocation would typically allocate a very large share (approaching 100%) to the main product and a very low share (approaching 0%) to the co-products. As such, the difference in results between the cut-off and co-product allocation approaches will be small.



# Environmental Product Declaration

There are the following exceptions to this approach:

- Blast furnace slag (BF slag) – this is not recycled internally but is generally sold for use in concrete, road building, etc. Impacts from the steel production process are allocated to the steel and BF slag co-products based on their economic value. CARES estimates that the value of reinforcing steel products is around \$670/tonne in 2023.
- Specifying a price for BF slag is very difficult as it is not traded openly. Prices agreed between steel producers and users of the slag are not made public and can vary considerably depending on quality, quantity, demand, contract period, etc. CARES estimates as per its market intelligence that the value of GGBFS products is around \$60/tonne in 2023.
- Coke oven products – as well as coke and coke breeze the coking process generates tar, ammonium sulphate, sulphuric acid, benzene and polymers of benzene separation. Due to commercial sensitivity, there is no price information available on these co-products. For this reason, mass-based allocation has been applied for co-products from this process. We acknowledge that this does not fully conform to the requirements of the PCR but feel that this approach is preferable to allocating all the impacts to the coke and coke breeze when some of the co-products are likely to have relatively high values (coke and coke breeze combined account for >99% of the output of this process).
- Energy rich gases – any excess gas generated that is not used within the steelworks is combusted to generate electricity and is sold externally. In the model this is looped back to satisfy some of the electricity demand of the steelworks.
- Process gases – Oxygen, Nitrogen, Argon and other gases produced from the on-site air separation unit are all consumed on site (no exports beyond A1-A3 boundary). For the particular production route modelled, impacts are allocated to the consumed gases based on volume.
- Pre-consumer steel scrap is produced as co-product from the steel manufacturing processes. This co-product is internally recycled.
- Post-consumer scrap is an input to steelmaking processes and is assumed to be free of burdens as once steel scrap has been collected for recycling it is considered to have reached the end of waste state. Hence, only transport impacts associated with importing the scrap are considered.

Allocation of background data (energy and materials) taken from the LCA FE (GaBi) Dataset Documentation (Sphera 2023.1).

All impacts associated with solid and liquid waste disposal are allocated to the steel products. This includes transport and landfill or wastewater treatment processes (modules A & C).

## Cut-off criteria

For the processes within the system boundary, all available energy and material flow data have been included in the model. In cases where no matching life cycle inventories are available to represent a flow, proxy data have been applied based on conservative assumptions regarding environmental impacts. Burdens relating to personnel, infrastructure, and production equipment not directly consumed in the process are excluded from the system boundary. As no material or energy flows were knowingly omitted, the requirements of the PCR have been met (BRE Global PCR PN514 3.1).

The mass of steel wire or strap used for binding the product coil is less than 1 % of the total mass of the product.





# Environmental Product Declaration

## LCA Results

(MND = module not declared; MNR = module not relevant; INA = indicator not assessed; AGG = aggregated)

| Core environmental impact indicators                      |                                      |      |                       |                       |                       |                       |             |                       |               |
|---|--------------------------------------|------|-----------------------|-----------------------|-----------------------|-----------------------|-------------|-----------------------|---------------|
| Life Cycle Stage  | Impact Category                      |      | GWP-total             | GWP-fossil            | GWP-biogenic          | GWP-luluc             | ODP         | AP                    | EP-freshwater |
|   |                                      |      | kg CO <sub>2</sub> eq | kg CO <sub>2</sub> eq | kg CO <sub>2</sub> eq | kg CO <sub>2</sub> eq | kg CFC11 eq | mol H <sup>+</sup> eq | kg P eq       |
| Product stage   | Raw material supply                  | A1   | AGG                   | AGG                   | AGG                   | AGG                   | AGG         | AGG                   | AGG           |
|   | Transport                            | A2   | AGG                   | AGG                   | AGG                   | AGG                   | AGG         | AGG                   | AGG           |
|   | Manufacturing                        | A3   | AGG                   | AGG                   | AGG                   | AGG                   | AGG         | AGG                   | AGG           |
|   | Total (of product stage)             | A1-3 | 2.02E+03              | 2.02E+03              | -1.10E+00             | 9.57E-01              | 8.38E-10    | 2.12E+00              | 1.08E-03      |
| Construction process stage                                | Transport                            | A4   | 6.77E+01              | 6.78E+01              | -5.04E-01             | 4.26E-01              | 3.58E-10    | 2.09E-01              | 2.50E-04      |
|   | Construction                         | A5   | 2.55E+02              | 2.55E+02              | -1.35E-01             | 1.46E-01              | 1.99E-10    | 2.73E-01              | 1.63E-04      |
| Use stage   | Use                                  | B1   | MND                   | MND                   | MND                   | MND                   | MND         | MND                   | MND           |
|   | Maintenance                          | B2   | MND                   | MND                   | MND                   | MND                   | MND         | MND                   | MND           |
|   | Repair                               | B3   | MND                   | MND                   | MND                   | MND                   | MND         | MND                   | MND           |
|   | Replacement                          | B4   | MND                   | MND                   | MND                   | MND                   | MND         | MND                   | MND           |
|   | Refurbishment                        | B5   | MND                   | MND                   | MND                   | MND                   | MND         | MND                   | MND           |
|   | Operational energy use               | B6   | MND                   | MND                   | MND                   | MND                   | MND         | MND                   | MND           |
|   | Operational water use                | B7   | MND                   | MND                   | MND                   | MND                   | MND         | MND                   | MND           |
| <b>%95 Recycling / %5 Landfill Scenario</b>               |                                      |      |                       |                       |                       |                       |             |                       |               |
| End of life   | Deconstruction, demolition           | C1   | 2.13E+00              | 2.13E+00              | 2.18E-03              | 4.06E-05              | 1.64E-13    | 3.35E-03              | 4.12E-07      |
|   | Transport                            | C2   | 2.20E-01              | 2.22E-01              | -3.27E-03             | 2.05E-03              | 1.93E-14    | 2.66E-04              | 8.06E-07      |
|   | Waste processing                     | C3   | 0                     | 0                     | 0                     | 0                     | 0           | 0                     | 0             |
|   | Disposal                             | C4   | 7.17E-01              | 7.40E-01              | -2.55E-02             | 2.33E-03              | 1.91E-12    | 5.33E-03              | 1.51E-06      |
| Potential benefits and loads beyond the system boundaries | Reuse, recovery, recycling potential | D    | -2.05E+03             | -2.05E+03             | 2.68E+00              | -4.75E-01             | 6.23E-09    | -4.71E+00             | 2.73E-06      |
| <b>100% Landfill Scenario</b>                             |                                      |      |                       |                       |                       |                       |             |                       |               |
| End of life   | Deconstruction, demolition           | C1   | 2.13E+00              | 2.13E+00              | 2.18E-03              | 4.06E-05              | 1.64E-13    | 3.35E-03              | 4.12E-07      |
|   | Transport                            | C2   | 4.41E+00              | 4.43E+00              | -6.54E-02             | 4.09E-02              | 3.87E-13    | 5.32E-03              | 1.61E-05      |
|   | Waste processing                     | C3   | 0                     | 0                     | 0                     | 0                     | 0           | 0                     | 0             |
|   | Disposal                             | C4   | 1.43E+01              | 1.48E+01              | -5.10E-01             | 4.67E-02              | 3.82E-11    | 1.07E-01              | 3.02E-05      |
| Potential benefits and loads beyond the system boundaries | Reuse, recovery, recycling potential | D    | -2.07E+02             | -2.08E+02             | 2.65E-01              | -4.39E-02             | 6.33E-10    | -4.77E-01             | 1.97E-06      |
| <b>100% Recycling Scenario</b>                            |                                      |      |                       |                       |                       |                       |             |                       |               |
| End of life   | Deconstruction, demolition           | C1   | 2.13E+00              | 2.13E+00              | 2.18E-03              | 4.06E-05              | 1.64E-13    | 3.35E-03              | 4.12E-07      |
|   | Transport                            | C2   | 0                     | 0                     | 0                     | 0                     | 0           | 0                     | 0             |
|   | Waste processing                     | C3   | 0                     | 0                     | 0                     | 0                     | 0           | 0                     | 0             |
|   | Disposal                             | C4   | 0                     | 0                     | 0                     | 0                     | 0           | 0                     | 0             |
| Potential benefits and loads beyond the system boundaries | Reuse, recovery, recycling potential | D    | -2.14E+03             | -2.15E+03             | 2.80E+00              | -4.98E-01             | 6.53E-09    | -4.93E+00             | 2.77E-06      |

GWP-total = Global warming potential, total;  
 GWP-fossil = Global warming potential, fossil;  
 GWP-biogenic = Global warming potential, biogenic;  
 GWP-luluc = Global warming potential, land use and land use change;

ODP = Depletion potential of the stratospheric ozone layer;  
 AP = Acidification potential, accumulated exceedance; and  
 EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment



# Environmental Product Declaration

## LCA Results (continued)

(MND = module not declared; MNR = module not relevant; INA = indicator not assessed; AGG = aggregated)

### Core environmental impact indicators

| Life Cycle Stage  | Impact Category                      |      | EP-marine | EP-terrestrial | POCP        | ADP-mineral & metals | ADP-fossil              | WDP                              |
|---|--------------------------------------|------|-----------|----------------|-------------|----------------------|-------------------------|----------------------------------|
|   |                                      |      | kg N eq   | mol N eq       | kg NMVOC eq | kg Sb eq             | MJ, net calorific value | m <sup>3</sup> world eq deprived |
| Product stage   | Raw material supply                  | A1   | AGG       | AGG            | AGG         | AGG                  | AGG                     | AGG                              |
|   | Transport                            | A2   | AGG       | AGG            | AGG         | AGG                  | AGG                     | AGG                              |
|   | Manufacturing                        | A3   | AGG       | AGG            | AGG         | AGG                  | AGG                     | AGG                              |
|   | Total (of product stage)             | A1-3 | 3.31E-01  | 3.56E+00       | 1.04E+00    | 6.42E-05             | 1.79E+04                | 9.41E+01                         |
| Construction process stage                                | Transport                            | A4   | 7.41E-02  | 8.27E-01       | 2.05E-01    | 6.67E-06             | 1.08E+03                | 4.56E+00                         |
|   | Construction                         | A5   | 4.43E-02  | 4.78E-01       | 1.37E-01    | 8.84E-06             | 2.34E+03                | 1.27E+01                         |
| Use stage   | Use                                  | B1   | MND       | MND            | MND         | MND                  | MND                     | MND                              |
|   | Maintenance                          | B2   | MND       | MND            | MND         | MND                  | MND                     | MND                              |
|   | Repair                               | B3   | MND       | MND            | MND         | MND                  | MND                     | MND                              |
|   | Replacement                          | B4   | MND       | MND            | MND         | MND                  | MND                     | MND                              |
|   | Refurbishment                        | B5   | MND       | MND            | MND         | MND                  | MND                     | MND                              |
|   | Operational energy use               | B6   | MND       | MND            | MND         | MND                  | MND                     | MND                              |
|   | Operational water use                | B7   | MND       | MND            | MND         | MND                  | MND                     | MND                              |
| <b>%95 Recycling / %5 Landfill Scenario</b>               |                                      |      |           |                |             |                      |                         |                                  |
| End of life   | Deconstruction, demolition           | C1   | 1.16E-03  | 1.28E-02       | 3.51E-03    | 2.15E-08             | 2.84E+01                | 5.48E-03                         |
|   | Transport                            | C2   | 8.97E-05  | 1.09E-03       | 2.27E-04    | 1.44E-08             | 3.00E+00                | 2.55E-03                         |
|   | Waste processing                     | C3   | 0         | 0              | 0           | 0                    | 0                       | 0                                |
|   | Disposal                             | C4   | 1.38E-03  | 1.51E-02       | 4.15E-03    | 3.47E-08             | 1.00E+01                | 8.25E-02                         |
| Potential benefits and loads beyond the system boundaries | Reuse, recovery, recycling potential | D    | -1.12E+00 | -1.21E+01      | -3.76E+00   | -1.92E-05            | -1.51E+04               | -2.97E+01                        |
| <b>100% Landfill Scenario</b>                             |                                      |      |           |                |             |                      |                         |                                  |
| End of life   | Deconstruction, demolition           | C1   | 1.16E-03  | 1.28E-02       | 3.51E-03    | 2.15E-08             | 2.84E+01                | 5.48E-03                         |
|   | Transport                            | C2   | 1.79E-03  | 2.18E-02       | 4.55E-03    | 2.87E-07             | 6.01E+01                | 5.09E-02                         |
|   | Waste processing                     | C3   | 0         | 0              | 0           | 0                    | 0                       | 0                                |
|   | Disposal                             | C4   | 2.75E-02  | 3.03E-01       | 8.31E-02    | 6.94E-07             | 2.00E+02                | 1.65E+00                         |
| Potential benefits and loads beyond the system boundaries | Reuse, recovery, recycling potential | D    | -1.14E-01 | -1.23E+00      | -3.81E-01   | -1.92E-06            | -1.53E+03               | -3.01E+00                        |
| <b>100% Recycling Scenario</b>                            |                                      |      |           |                |             |                      |                         |                                  |
| End of life   | Deconstruction, demolition           | C1   | 1.16E-03  | 1.28E-02       | 3.51E-03    | 2.15E-08             | 2.84E+01                | 5.48E-03                         |
|   | Transport                            | C2   | 0         | 0              | 0           | 0                    | 0                       | 0                                |
|   | Waste processing                     | C3   | 0         | 0              | 0           | 0                    | 0                       | 0                                |
|   | Disposal                             | C4   | 0         | 0              | 0           | 0                    | 0                       | 0                                |
| Potential benefits and loads beyond the system boundaries | Reuse, recovery, recycling potential | D    | -1.18E+00 | -1.27E+01      | -3.94E+00   | -2.01E-05            | -1.58E+04               | -3.11E+01                        |

ADP-mineral&metals = Abiotic depletion potential for non-fossil resources;  
 ADP-fossil = Depletion potential of the stratospheric ozone layer;  
 WDP = Water (user) deprivation potential, deprivation-weighted water consumption.  
 The results of the three environmental impact indicators above shall be used with care as the uncertainties on these results are high or as there is limited experience with these indicators.

EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment;  
 EP-terrestrial = Eutrophication potential, accumulated exceedance;  
 POCP = Formation potential of tropospheric ozone;  
 PM = Particulate matter.



# Environmental Product Declaration

## LCA Results (continued)

(MND = module not declared; MNR = module not relevant; INA = indicator not assessed; AGG = aggregated)

### Parameters describing environmental impacts

| Life Cycle Stage  | Impact Category                      |      | PM                | IRP                     | ETP-fw    | HTP-c     | HTP-nc    | SQP           |
|---|--------------------------------------|------|-------------------|-------------------------|-----------|-----------|-----------|---------------|
|   |                                      |      | disease incidence | kBq U <sup>235</sup> eq | CTUe      | CTUh      | CTUh      | dimensionless |
| Product stage   | Raw material supply                  | A1   | AGG               | AGG                     | AGG       | AGG       | AGG       | AGG           |
|   | Transport                            | A2   | AGG               | AGG                     | AGG       | AGG       | AGG       | AGG           |
|   | Manufacturing                        | A3   | AGG               | AGG                     | AGG       | AGG       | AGG       | AGG           |
|   | Total (of product stage)             | A1-3 | 1.03E-05          | -3.30E+01               | 2.53E+03  | -5.70E-08 | -5.07E-06 | 7.28E+02      |
| Construction process stage                                | Transport                            | A4   | 1.94E-06          | 6.81E+00                | 5.52E+02  | 1.60E-08  | 5.04E-07  | 4.45E+02      |
|   | Construction                         | A5   | 1.38E-06          | -1.13E+00               | 3.68E+02  | -4.72E-09 | -5.63E-07 | 1.49E+02      |
| Use stage   | Use                                  | B1   | MND               | MND                     | MND       | MND       | MND       | MND           |
|   | Maintenance                          | B2   | MND               | MND                     | MND       | MND       | MND       | MND           |
|   | Repair                               | B3   | MND               | MND                     | MND       | MND       | MND       | MND           |
|   | Replacement                          | B4   | MND               | MND                     | MND       | MND       | MND       | MND           |
|   | Refurbishment                        | B5   | MND               | MND                     | MND       | MND       | MND       | MND           |
|   | Operational energy use               | B6   | MND               | MND                     | MND       | MND       | MND       | MND           |
|   | Operational water use                | B7   | MND               | MND                     | MND       | MND       | MND       | MND           |
| <b>%95 Recycling / %5 Landfill Scenario</b>               |                                      |      |                   |                         |           |           |           |               |
| End of life   | Deconstruction, demolition           | C1   | 1.88E-08          | 4.64E-03                | 2.01E+01  | 4.86E-10  | 1.17E-08  | 9.45E-02      |
|   | Transport                            | C2   | 1.79E-09          | 5.62E-04                | 2.12E+00  | 4.27E-11  | 1.88E-09  | 1.25E+00      |
|   | Waste processing                     | C3   | 0                 | 0                       | 0         | 0         | 0         | 0             |
|   | Disposal                             | C4   | 6.55E-08          | 1.31E-02                | 6.29E+00  | 8.40E-10  | 8.87E-08  | 2.43E+00      |
| Potential benefits and loads beyond the system boundaries | Reuse, recovery, recycling potential | D    | -6.91E-05         | 3.09E+01                | -2.00E+03 | -3.26E-06 | 2.90E-06  | 1.73E+03      |
| <b>100% Landfill Scenario</b>                             |                                      |      |                   |                         |           |           |           |               |
| End of life   | Deconstruction, demolition           | C1   | 1.88E-08          | 4.64E-03                | 2.01E+01  | 4.86E-10  | 1.17E-08  | 9.45E-02      |
|   | Transport                            | C2   | 3.59E-08          | 1.12E-02                | 4.23E+01  | 8.53E-10  | 3.77E-08  | 2.51E+01      |
|   | Waste processing                     | C3   | 0                 | 0                       | 0         | 0         | 0         | 0             |
|   | Disposal                             | C4   | 1.31E-06          | 2.63E-01                | 1.26E+02  | 1.68E-08  | 1.77E-06  | 4.86E+01      |
| Potential benefits and loads beyond the system boundaries | Reuse, recovery, recycling potential | D    | -7.01E-06         | 3.14E+00                | -1.98E+02 | -3.31E-07 | 2.98E-07  | 1.78E+02      |
| <b>100% Recycling Scenario</b>                            |                                      |      |                   |                         |           |           |           |               |
| End of life   | Deconstruction, demolition           | C1   | 1.88E-08          | 4.64E-03                | 2.01E+01  | 4.86E-10  | 1.17E-08  | 9.45E-02      |
|   | Transport                            | C2   | 0                 | 0                       | 0         | 0         | 0         | 0             |
|   | Waste processing                     | C3   | 0                 | 0                       | 0         | 0         | 0         | 0             |
|   | Disposal                             | C4   | 0                 | 0                       | 0         | 0         | 0         | 0             |
| Potential benefits and loads beyond the system boundaries | Reuse, recovery, recycling potential | D    | -7.24E-05         | 3.24E+01                | -2.09E+03 | -3.42E-06 | 3.03E-06  | 1.81E+03      |

IRP = Potential human exposure efficiency relative to U235; This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator.

HTP-nc = Potential comparative toxic unit for humans; and ETP-fw = Potential comparative toxic unit for ecosystems; HTP-c = Potential comparative toxic unit for humans; SQP = Potential soil quality index. The results of the four environmental impact indicators above shall be used with care as the uncertainties on these results are high or as there is limited experience with these indicators.



# Environmental Product Declaration

## LCA Results (continued)

(MND = module not declared; MNR = module not relevant; INA = indicator not assessed; AGG = aggregated)

### Parameters describing resource use

| Life Cycle Stage  | Impact Category                      |      | PERE      | PERM | PERT      | PENRE     | PENRM | PENRT     |
|---|--------------------------------------|------|-----------|------|-----------|-----------|-------|-----------|
|   |                                      |      | MJ        | MJ   | MJ        | MJ        | MJ    | MJ        |
| Product stage   | Raw material supply                  | A1   | AGG       | AGG  | AGG       | AGG       | AGG   | AGG       |
|   | Transport                            | A2   | AGG       | AGG  | AGG       | AGG       | AGG   | AGG       |
|   | Manufacturing                        | A3   | AGG       | AGG  | AGG       | AGG       | AGG   | AGG       |
|   | Total (of product stage)             | A1-3 | -3.20E+02 | 0    | -3.20E+02 | 1.79E+04  | 0     | 1.79E+04  |
| Construction process stage                                | Transport                            | A4   | 3.09E+02  | 0    | 3.09E+02  | 1.08E+03  | 0     | 1.08E+03  |
|   | Construction                         | A5   | 2.95E+01  | 0    | 2.95E+01  | 2.34E+03  | 0     | 2.34E+03  |
| Use stage   | Use                                  | B1   | MND       | MND  | MND       | MND       | MND   | MND       |
|   | Maintenance                          | B2   | MND       | MND  | MND       | MND       | MND   | MND       |
|   | Repair                               | B3   | MND       | MND  | MND       | MND       | MND   | MND       |
|   | Replacement                          | B4   | MND       | MND  | MND       | MND       | MND   | MND       |
|   | Refurbishment                        | B5   | MND       | MND  | MND       | MND       | MND   | MND       |
|   | Operational energy use               | B6   | MND       | MND  | MND       | MND       | MND   | MND       |
|   | Operational water use                | B7   | MND       | MND  | MND       | MND       | MND   | MND       |
| <b>%95 Recycling / %5 Landfill Scenario</b>               |                                      |      |           |      |           |           |       |           |
| End of life   | Deconstruction, demolition           | C1   | 1.25E-01  | 0    | 1.25E-01  | 2.84E+01  | 0     | 2.84E+01  |
|   | Transport                            | C2   | 2.13E-01  | 0    | 2.13E-01  | 3.01E+00  | 0     | 3.01E+00  |
|   | Waste processing                     | C3   | 0         | 0    | 0         | 0         | 0     | 0         |
|   | Disposal                             | C4   | 1.63E+00  | 0    | 1.63E+00  | 1.00E+01  | 0     | 1.00E+01  |
| Potential benefits and loads beyond the system boundaries | Reuse, recovery, recycling potential | D    | 2.65E+03  | 0    | 2.65E+03  | -1.53E+04 | 0     | -1.53E+04 |
| <b>100% Landfill Scenario</b>                             |                                      |      |           |      |           |           |       |           |
| End of life   | Deconstruction, demolition           | C1   | 1.25E-01  | 0    | 1.25E-01  | 2.84E+01  | 0     | 2.84E+01  |
|   | Transport                            | C2   | 4.25E+00  | 0    | 4.25E+00  | 6.02E+01  | 0     | 6.02E+01  |
|   | Waste processing                     | C3   | 0         | 0    | 0         | 0         | 0     | 0         |
|   | Disposal                             | C4   | 3.26E+01  | 0    | 3.26E+01  | 2.00E+02  | 0     | 2.00E+02  |
| Potential benefits and loads beyond the system boundaries | Reuse, recovery, recycling potential | D    | 2.70E+02  | 0    | 2.70E+02  | -1.54E+03 | 0     | -1.54E+03 |
| <b>100% Recycling Scenario</b>                            |                                      |      |           |      |           |           |       |           |
| End of life   | Deconstruction, demolition           | C1   | 1.25E-01  | 0    | 1.25E-01  | 2.84E+01  | 0     | 2.84E+01  |
|   | Transport                            | C2   | 0         | 0    | 0         | 0         | 0     | 0         |
|   | Waste processing                     | C3   | 0         | 0    | 0         | 0         | 0     | 0         |
|   | Disposal                             | C4   | 0         | 0    | 0         | 0         | 0     | 0         |
| Potential benefits and loads beyond the system boundaries | Reuse, recovery, recycling potential | D    | 2.78E+03  | 0    | 2.78E+03  | -1.60E+04 | 0     | -1.60E+04 |

PERE = Use of renewable primary energy excluding renewable primary energy used as raw materials;  
 PERM = Use of renewable primary energy resources used as raw materials;  
 PERT = Total use of renewable primary energy resources;

PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials;  
 PENRM = Use of non-renewable primary energy resources used as raw materials;  
 PENRT = Total use of non-renewable primary energy resource



# Environmental Product Declaration

## LCA Results (continued)

(MND = module not declared; MNR = module not relevant; INA = indicator not assessed; AGG = aggregated)

| Parameters describing resource use                        |                                      |      |          |                        |                        |                |
|---|--------------------------------------|------|----------|------------------------|------------------------|----------------|
| Life Cycle Stage  | Impact Category                      |      | SM       | RSF                    | NRSF                   | FW             |
|   |                                      |      | kg       | MJ net calorific value | MJ net calorific value | m <sup>3</sup> |
| Product stage   | Raw material supply                  | A1   | AGG      | AGG                    | AGG                    | AGG            |
|   | Transport                            | A2   | AGG      | AGG                    | AGG                    | AGG            |
|   | Manufacturing                        | A3   | AGG      | AGG                    | AGG                    | AGG            |
|   | Total (of product stage)             | A1-3 | 6.55E+01 | 0                      | 0                      | 2.55E+00       |
| Construction process stage                                | Transport                            | A4   | 0        | 0                      | 0                      | 1.81E-01       |
|   | Construction                         | A5   | 7.99E+00 | 0                      | 0                      | 3.67E-01       |
| Use stage   | Use                                  | B1   | MND      | MND                    | MND                    | MND            |
|   | Maintenance                          | B2   | MND      | MND                    | MND                    | MND            |
|   | Repair                               | B3   | MND      | MND                    | MND                    | MND            |
|   | Replacement                          | B4   | MND      | MND                    | MND                    | MND            |
|   | Refurbishment                        | B5   | MND      | MND                    | MND                    | MND            |
|   | Operational energy use               | B6   | MND      | MND                    | MND                    | MND            |
|   | Operational water use                | B7   | MND      | MND                    | MND                    | MND            |
| <b>%95 Recycling / %5 Landfill Scenario</b>               |                                      |      |          |                        |                        |                |
| End of life   | Deconstruction, demolition           | C1   | 0        | 0                      | 0                      | 2.03E-04       |
|   | Transport                            | C2   | 0        | 0                      | 0                      | 2.34E-04       |
|   | Waste processing                     | C3   | 0        | 0                      | 0                      | 0              |
|   | Disposal                             | C4   | 0        | 0                      | 0                      | 2.53E-03       |
| Potential benefits and loads beyond the system boundaries | Reuse, recovery, recycling potential | D    | 0        | 0                      | 0                      | -1.31E+00      |
| <b>100% Landfill Scenario</b>                             |                                      |      |          |                        |                        |                |
| End of life   | Deconstruction, demolition           | C1   | 0        | 0                      | 0                      | 2.03E-04       |
|   | Transport                            | C2   | 0        | 0                      | 0                      | 4.69E-03       |
|   | Waste processing                     | C3   | 0        | 0                      | 0                      | 0.00E+00       |
|   | Disposal                             | C4   | 0        | 0                      | 0                      | 5.05E-02       |
| Potential benefits and loads beyond the system boundaries | Reuse, recovery, recycling potential | D    | 0        | 0                      | 0                      | -1.32E-01      |
| <b>100% Recycling Scenario</b>                            |                                      |      |          |                        |                        |                |
| End of life   | Deconstruction, demolition           | C1   | 0        | 0                      | 0                      | 2.03E-04       |
|   | Transport                            | C2   | 0        | 0                      | 0                      | 0              |
|   | Waste processing                     | C3   | 0        | 0                      | 0                      | 0              |
|   | Disposal                             | C4   | 0        | 0                      | 0                      | 0              |
| Potential benefits and loads beyond the system boundaries | Reuse, recovery, recycling potential | D    | 0        | 0                      | 0                      | -1.37E+00      |

SM = Use of secondary material;  
RSF = Use of renewable secondary fuels;

NRSF = Use of non-renewable secondary fuels;  
FW = Net use of fresh water



# Environmental Product Declaration

## LCA Results (continued)

(MND = module not declared; MNR = module not relevant; INA = indicator not assessed; AGG = aggregated)

### Other environmental information describing waste categories

| Life Cycle Stage  | Impact Category                      |      | HWD       | NHWD      | RWD       |
|---|--------------------------------------|------|-----------|-----------|-----------|
|   |                                      |      | kg        | kg        | kg        |
| Product stage   | Raw material supply                  | A1   | AGG       | AGG       | AGG       |
|   | Transport                            | A2   | AGG       | AGG       | AGG       |
|   | Manufacturing                        | A3   | AGG       | AGG       | AGG       |
|   | Total (of product stage)             | A1-3 | -2.87E-08 | 1.54E+02  | -5.46E-01 |
| Construction process stage                                | Transport                            | A4   | -3.15E-08 | 4.61E-01  | 7.26E-02  |
|   | Construction                         | A5   | -1.19E-08 | 2.09E+01  | -4.91E-02 |
| Use stage   | Use                                  | B1   | MND       | MND       | MND       |
|   | Maintenance                          | B2   | MND       | MND       | MND       |
|   | Repair                               | B3   | MND       | MND       | MND       |
|   | Replacement                          | B4   | MND       | MND       | MND       |
|   | Refurbishment                        | B5   | MND       | MND       | MND       |
|   | Operational energy use               | B6   | MND       | MND       | MND       |
|   | Operational water use                | B7   | MND       | MND       | MND       |
| <b>%95 Recycling / %5 Landfill Scenario</b>               |                                      |      |           |           |           |
| End of life   | Deconstruction, demolition           | C1   | 8.19E-11  | 5.88E-03  | 3.28E-05  |
|   | Transport                            | C2   | 1.11E-11  | 4.34E-04  | 3.89E-06  |
|   | Waste processing                     | C3   | 0         | 0         | 0         |
|   | Disposal                             | C4   | 2.18E-10  | 5.00E+01  | 1.14E-04  |
| Potential benefits and loads beyond the system boundaries | Reuse, recovery, recycling potential | D    | -3.78E-08 | -3.14E+01 | 2.80E-01  |
| <b>100% Landfill Scenario</b>                             |                                      |      |           |           |           |
| End of life   | Deconstruction, demolition           | C1   | 8.19E-11  | 5.88E-03  | 3.28E-05  |
|   | Transport                            | C2   | 2.23E-10  | 8.68E-03  | 7.79E-05  |
|   | Waste processing                     | C3   | 0         | 0         | 0         |
|   | Disposal                             | C4   | 4.36E-09  | 1.00E+03  | 2.28E-03  |
| Potential benefits and loads beyond the system boundaries | Reuse, recovery, recycling potential | D    | -3.82E-09 | -3.19E+00 | 2.84E-02  |
| <b>100% Recycling Scenario</b>                            |                                      |      |           |           |           |
| End of life   | Deconstruction, demolition           | C1   | 8.19E-11  | 5.88E-03  | 3.28E-05  |
|   | Transport                            | C2   | 0         | 0         | 0         |
|   | Waste processing                     | C3   | 0         | 0         | 0         |
|   | Disposal                             | C4   | 0         | 0         | 0         |
| Potential benefits and loads beyond the system boundaries | Reuse, recovery, recycling potential | D    | -3.96E-08 | -3.29E+01 | 2.93E-01  |

HWD = Hazardous waste disposed;  
 NHWD = Non-hazardous waste disposed;  
 RWD = Radioactive waste disposed



# Environmental Product Declaration

## LCA Results (continued)

(MND = module not declared; MNR = module not relevant; INA = indicator not assessed; AGG = aggregated)

### Other environmental information describing output flows – at end of life

| Life Cycle Stage  | Impact Category                      |      | CRU | MFR      | MER | EE                    | Biogenic carbon (product) | Biogenic carbon (packaging) |
|---|--------------------------------------|------|-----|----------|-----|-----------------------|---------------------------|-----------------------------|
|   |                                      |      | kg  | kg       | kg  | MJ per energy carrier | kg C                      | kg C                        |
| Product stage   | Raw material supply                  | A1   | AGG | AGG      | AGG | AGG                   | AGG                       | AGG                         |
|   | Transport                            | A2   | AGG | AGG      | AGG | AGG                   | AGG                       | AGG                         |
|   | Manufacturing                        | A3   | AGG | AGG      | AGG | AGG                   | AGG                       | AGG                         |
|   | Total (of product stage)             | A1-3 | 0   | 0        | 0   | 0                     | 0                         | 0                           |
| Construction process stage                                | Transport                            | A4   | 0   | 0        | 0   | 0                     | 0                         | 0                           |
|   | Construction                         | A5   | 0   | 120      | 0   | 0                     | 0                         | 0                           |
| Use stage   | Use                                  | B1   | MND | MND      | MND | MND                   | MND                       | MND                         |
|   | Maintenance                          | B2   | MND | MND      | MND | MND                   | MND                       | MND                         |
|   | Repair                               | B3   | MND | MND      | MND | MND                   | MND                       | MND                         |
|   | Replacement                          | B4   | MND | MND      | MND | MND                   | MND                       | MND                         |
|   | Refurbishment                        | B5   | MND | MND      | MND | MND                   | MND                       | MND                         |
|   | Operational energy use               | B6   | MND | MND      | MND | MND                   | MND                       | MND                         |
|   | Operational water use                | B7   | MND | MND      | MND | MND                   | MND                       | MND                         |
| <b>%95 Recycling / %5 Landfill Scenario</b>               |                                      |      |     |          |     |                       |                           |                             |
| End of life   | Deconstruction, demolition           | C1   | 0   | 0        | 0   | 0                     | 0                         | 0                           |
|   | Transport                            | C2   | 0   | 0        | 0   | 0                     | 0                         | 0                           |
|   | Waste processing                     | C3   | 0   | 9.50E+02 | 0   | 0                     | 0                         | 0                           |
|   | Disposal                             | C4   | 0   | 0        | 0   | 0                     | 0                         | 0                           |
| Potential benefits and loads beyond the system boundaries | Reuse, recovery, recycling potential | D    | 0   | 0        | 0   | 0                     | 0                         | 0                           |
| <b>100% Landfill Scenario</b>                             |                                      |      |     |          |     |                       |                           |                             |
| End of life   | Deconstruction, demolition           | C1   | 0   | 0        | 0   | 0                     | 0                         | 0                           |
|   | Transport                            | C2   | 0   | 0        | 0   | 0                     | 0                         | 0                           |
|   | Waste processing                     | C3   | 0   | 0        | 0   | 0                     | 0                         | 0                           |
|   | Disposal                             | C4   | 0   | 0        | 0   | 0                     | 0                         | 0                           |
| Potential benefits and loads beyond the system boundaries | Reuse, recovery, recycling potential | D    | 0   | 0        | 0   | 0                     | 0                         | 0                           |
| <b>100% Recycling Scenario</b>                            |                                      |      |     |          |     |                       |                           |                             |
| End of life   | Deconstruction, demolition           | C1   | 0   | 0        | 0   | 0                     | 0                         | 0                           |
|   | Transport                            | C2   | 0   | 0        | 0   | 0                     | 0                         | 0                           |
|   | Waste processing                     | C3   | 0   | 1.00E+03 | 0   | 0                     | 0                         | 0                           |
|   | Disposal                             | C4   | 0   | 0        | 0   | 0                     | 0                         | 0                           |
| Potential benefits and loads beyond the system boundaries | Reuse, recovery, recycling potential | D    | 0   | 0        | 0   | 0                     | 0                         | 0                           |

CRU = Components for reuse;  
MFR = Materials for recycling

MER = Materials for energy recovery;  
EE = Exported Energy



## Scenarios and additional technical information

| Scenarios and additional technical information                       |  |                   |         |
|--|--|-------------------|---------|
| Scenario   | Parameter  | Units             | Results |
| Modules C1 to C4<br>End of life                                      | <p>The end-of-life stage starts when the construction product is replaced, dismantled or deconstructed from the building or construction works and does not provide any further function. The recovered steel is transported for recycling while a small portion is assumed to be unrecoverable and remains in the rubble which is sent to landfill. 95% of the reinforcing steel is assumed to be recycled and 5% is sent to landfill [STEELCONSTRUCTION.INFO 2012].</p> <p>Once steel scrap is generated through the deconstruction activities on the demolition site it is considered to have reached the "end of waste" state. No further processing is required so there are no impacts associated with this module. Hence no impacts are reported in module C3.</p>  |                   |         |
|  | Waste for recycling - Recovered steel from crushed concrete  | %                 | 95      |
|  | Waste for energy recovery  | %                 | -       |
|  | Waste for final disposal - Unrecoverable steel lost in crushed concrete and sent to landfill   | %                 | 5       |
|  | Portion of energy assigned to rebar from energy required to demolish building, per tonne   | MJ                | 24      |
|  | Transport to waste processing by Truck - Fuel consumption  | litre/km          | 1.56    |
|  | Transport to waste processing by Truck – Distance  | km                | 463     |
|  | Transport to waste processing by Truck – Capacity utilisation  | %                 | 85      |
|  | Transport to waste processing by Truck – Density of Product  | kg/m <sup>3</sup> | 7850    |
|  | Transport to waste processing by Container ship - Fuel consumption   | litre/km          | 0.0041  |
|  | Transport to waste processing by Container ship - Distance   | km                | 158     |
|  | Transport to waste processing by Container ship – Capacity utilisation   | %                 | 50      |
| Transport to waste processing by Container ship – Density of Product | kg/m <sup>3</sup>  | 7850              |         |
| Module D   | <p>It is assumed that 95% of the steel used in the structure is recovered for recycling, while the remainder is landfilled. Module D accounts for the environmental benefits and loads resulting from net steel scrap that is used for recycling at end of life. The balance between total scrap arisings recycled from installation and end of life and scrap consumed by the manufacturing process (internally sourced scrap is not included in this calculation). These benefits and loads are calculated by including the burdens of recycling and the benefit of avoided primary production.</p> <p>A large amount of net scrap is generated over the life cycle as the BF/BOF production route is primarily from virgin sources and there is a very high end of life recycling rate for this product. Benefits and loads associated with this scrap are calculated by including the burdens of recycling process and accounting for the avoided primary production. As a result, module D reports the credits associated with the scrap output.</p> <p>The resulting scrap credit/burden is calculated based on the global "value of scrap" approach (/worldsteel 2011).</p> |                   |         |
|  | Recycled Content   | kg                | 20      |
|  | Re-used Content  | kg                | 0       |
|  | Recovered for recycling  | kg                | 920     |
|  | Recovered for re-use   | kg                | 0       |
|  | Recovered for energy   | kg                | 0       |





## Summary, comments and additional information

### Interpretation

The production stage (A1-A3) is the most important module for climate change, eutrophication freshwater, resource use (mineral and metals) and resource use (energy carriers) as well as water scarcity

Module D presents a significant credit in all impact categories, except for ODP. Impacts from other life cycle stages are negligible in comparison

### References

BSI. Sustainability of construction works – Environmental product declarations – Core rules for the product category of construction products. BS EN 15804:2012+A2:2019. London, BSI, 2019.

BSI. Environmental labels and declarations. Self-declared environmental claims (Type II environmental labelling). BS EN ISO 14021:2016+A1:2021. London, BSI, 2022

BSI. Environmental labels and declarations – Type III Environmental declarations – Principles and procedures. BS EN ISO 14025:2010 (exactly identical to ISO 14025:2006). London, BSI, 2010.

BSI. Environmental management – Life cycle assessment – Principles and framework. BS EN ISO BS EN ISO 14040:2006+A1:2020. London, BSI, 2020.

BSI. Environmental management – Life cycle assessment – requirements and guidelines. BS EN ISO 14044:2006+A2:2020. London, BSI, 2020.

BSI. Sustainability of construction works. Data quality for environmental assessment of products and construction work. Selection and use of data. BS EN 15941:2024. London, 2024.

BSI. Sustainability of construction works. Environmental product declarations. Communication format business-to-business. BS EN 15942:2021. London, 2021.

BSI. Eurocode. Basis of structural and geotechnical design. BS EN 1990:2023. London, 2023.

Demolition Energy Analysis of Office Building Structural Systems, Athena Sustainable Materials Institute, 1997

The Concrete Society, [Design working life \(concrete.org.uk\)](https://www.concrete.org.uk)

LCA FE (GaBi) Software System and Database for Life Cycle Engineering, Sphera Solution GmbH, Leinfelden-Echterdingen

LCA FE (GaBi) Dataset Documentation for the LCA FE Software System and Database for Life Cycle Engineering, version 2023.1, Sphera Solution GmbH, Leinfelden-Echterdingen, [https://www.LCA FE \(GaBi\)-software.com/databases/LCA FE \(GaBi\)-databases/](https://www.LCA FE (GaBi)-software.com/databases/LCA FE (GaBi)-databases/)

International Energy Agency, Energy Statistics 2013. <http://www.iea.org>

Kreißig, J. und J. Kümmel (1999): Baustoff-Ökobilanzen. Wirkungsabschätzung und Auswertung in der Steine-Erden-Industrie. Hrsg. Bundesverband Baustoffe Steine + Erden e.V.

U.S. Geological Survey, Mineral Commodity Summaries, Iron and Steel Slag, January 2014

SteelConstruction.info; The recycling and reuse survey, 2012  
[http://www.steelconstruction.info/The\\_recycling\\_and\\_reuse\\_survey](http://www.steelconstruction.info/The_recycling_and_reuse_survey)



# Environmental Product Declaration

Sustainability of construction works - Environmental product declarations - Methodology for selection and use of generic data; German version CEN/TR 15941

REGULATION (EU) No 305/2011 OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL of 9 March 2011 laying down harmonised conditions for the marketing of construction products and repealing Council Directive 89/106/EEC

WRAP (2017). WRAP (Waste & Resources Action Programme) Net Waste Tool

worldsteel Association - Life cycle inventory methodology report for steel products, 2017

CARES SRC Steel for the reinforcement of concrete scheme Appendix 5 - Quality and operations assessment schedule for the production of billets and wire rod for further processing into carbon steel bar, coil or rod for the reinforcement of concrete, including inspection and testing requirements.

CARES SRC Steel for the Reinforcement of Concrete Scheme. Appendix 1 – Quality and operations assessment schedule for carbon steel bars for the reinforcement of concrete including inspection and testing requirements

MS 1494:2000 Specification for Billets for Hot Rolled Non-Alloyed Steel Bars and Rods

BS 4449:2005+A3:2016 Steel for the reinforcement of concrete. Weldable reinforcing steel. Bar, coil and decoiled product. Specification.

CS2:2012 - Steel Reinforcing Bars for the Reinforcement of Concrete

SS 560:2010 - Steel for the reinforcement of concrete – Weldable reinforcing steel – Bar, coil and decoiled product.

ISO 6935-2:2019 - Steel for the reinforcement of concrete - Part 2: Ribbed bars.